



COYOTE® 9.5" x 28" (292 mm x 711 mm) Terminal Dome Closure

Be sure to read and completely understand this procedure before applying product. Be sure to select the proper PREFORMED™ product before application.



NOMENCLATURE

- 1. Dome (1)
- 2. Hardened Adapter End Plate with 9.5" x 28" Organizer (1)
- 3. Dome Collar (1)
- 4. Dome Gasket (1)
- 5. Grommet Kit (1) (0.42" - 0.60" Cable Range)
- 6. Grommet Kit (1) (0.60" - 0.85" Cable Range)

- 7. Small Parts Bag (1)
- 8. LITE-GRIP® Short Splice Tray (1)
- 9. Pigtail Kit (0 or 1 or 2)
- 10. Transition Tubing Kit - Ribbon Organizers ONLY (1)
- 11. Transport Tubing Kit - Ribbon Organizers ONLY (2)

TOOLS REQUIRED


























- 3/8" & 7/16" Can Wrench or Socket
- Side Cutters
- Snips
- Fiber Optic Cable Opening Tools
- 1/4" Nut Driver
- Utility Knife

COYOTE Terminal Dome Closure 9.5" x 28" Splice Tray Capacity Chart

PLP Catalog Number	Description	Image	Splice Type	Max Trays per Closure	Closure Max Splice Capacity
80810086	Long Standard Profile LITE-GRIP Splice Tray (36 ct)		Single Fusion	With Buffer Tube Organizer - 9 With Ribbon Organizer - 5	With Buffer Tube Organizer - 324 With Ribbon Organizer - 180
LGSTS72	Long Deep Profile LITE-GRIP Splice Tray (72 ct)		Single Fusion	With Buffer Tube Organizer - 6 With Ribbon Organizer - 3	With Buffer Tube Organizer - 432 With Ribbon Organizer - 216
LGSTR216	Long Deep Profile LITE-GRIP Splice Tray (216 ct)		Mass Fusion/ Ribbon	With Buffer Tube Organizer - N/A With Ribbon Organizer - 3	With Buffer Tube Organizer - N/A With Ribbon Organizer - 648

PLP Catalog Number	Description
Closure Kits for COYOTE 9.5" x 28" Terminal Dome	
COYTD928B0-000	COYOTE 9.5" x 28" Terminal Dome Closure with 0 Hardened Adapters – Buffer Tube Applications
COYTD928B2-000	COYOTE 9.5" x 28" Terminal Dome Closure with 2 Hardened Adapters – Buffer Tube Applications
COYTD928B4-000	COYOTE 9.5" x 28" Terminal Dome Closure with 4 Hardened Adapters – Buffer Tube Applications
COYTD928B6-000	COYOTE 9.5" x 28" Terminal Dome Closure with 6 Hardened Adapters – Buffer Tube Applications
COYTD928B8-000	COYOTE 9.5" x 28" Terminal Dome Closure with 8 Hardened Adapters – Buffer Tube Applications
COYTD928R0-000	COYOTE 9.5" x 28" Terminal Dome Closure with 0 Hardened Adapters – Ribbon Applications
COYTD928R2-000	COYOTE 9.5" x 28" Terminal Dome Closure with 2 Hardened Adapters – Ribbon Applications
COYTD928R4-000	COYOTE 9.5" x 28" Terminal Dome Closure with 4 Hardened Adapters – Ribbon Applications
COYTD928R6-000	COYOTE 9.5" x 28" Terminal Dome Closure with 6 Hardened Adapters – Ribbon Applications
COYTD928R8-000	COYOTE 9.5" x 28" Terminal Dome Closure with 8 Hardened Adapters – Ribbon Applications
Accessory Kits for COYOTE 9.5" x 28" Terminal Dome	
COYEPFIX1	End Plate Assembly Fixture for COYOTE Domes
8004160	Heat Shrink Splice Protector Kit – Includes (50) 40 mm Mass Fusion
8004095	Heat Shrink Splice Protector Kit – Includes (50) 40 mm Single Fusion
8003717	Heat Shrink Splice Protector Kit – Includes (50) 60 mm Single Fusion
80061477	9.5" End Plate Gasket and Latching Collar
80809205	Strength Member Bracket Kit – Includes (2) Short L-Brackets
800015236	Strength Member Bracket Kit – Includes (3) Long L-Brackets and (3) Hose Clamps
80808651	Strength Member Bracket Kit – Includes (4) Long L-Brackets
80808878	Large Strength Member Adapter Kit
80811037	4-Port Cable Retention Bobbin Kit
80811036	6-Port Drop Cable Retention Bobbin Kit
80812928	6/8-Port Drop Cable Retention Bobbin Kit
8003715	Hardened Adapter Kit with Installation Tool
8004115	Bulk Pack of Hardened Adapters – Includes (10) Hardened Adapters
8003724	Plug Kit with Installation Tool
8004060	Bulk Plug Kit – Includes (10) Plugs
80807972	Adapter Installation Tool
Mounting Brackets for COYOTE 9.5" x 28" Terminal Dome	
8003940	Aerial Mounting Bracket – Strand Applications
8003941	Aerial Mounting Bracket – End Plate Mounting Applications
8003869	Aerial Mounting Bracket – ADSS Applications
8004037	Aerial Adjustable Offset Mounting Bracket – Strand Applications
8004038	Aerial Adjustable Offset Mounting Bracket – ADSS Applications
8003942	Pole/Wall Mounting Bracket
8004003	Manhole Support Bracket

COYOTE Grommet Chart for COYOTE 9.5" x 28" Terminal Dome Closure

PLP Catalog Number	Cable Range Inches (mm)	Description	Image	Slitting Location
8003691	.40 - .60 (10.2 - 15.2 mm)	1-entry grommet		
8003692	.60 - .85 (15.2 - 21.6 mm)	1-entry grommet		
8003693	.85 - 1.00 (21.6 - 25.4 mm)	1-entry grommet		
8003694	1.00 - 1.25 (25.4 - 31.8 mm)	1-entry grommet		
8003663	.42 - .60 (10.7 - 15.2 mm)	2-entry grommet		
8003664	.30 - .43 (7.6 - 10.9 mm)	4-entry grommet		
8004065	.250 - .312 (6.4 - 7.9 mm)	4-entry grommet		
8003990	.50 - .60 (12.7 - 15.2 mm) .125 - .250 (3.2 - 6.4 mm) and flat drop	4-entry grommet		
8003665	.125 - .250 (3.2 - 6.4 mm) and flat drop	6-entry grommet		
8003676	.42 - .60 (10.7 - 15.2 mm) .125 - .250 (3.2 - 6.4 mm) and flat drop	7-entry grommet		
8004094	.093" - .125" (2.4 - 3.2 mm)	8-entry grommet		
8003677	.125 - .250 (3.2 - 6.4 mm) and flat drop	8-entry grommet		N/A
8004122	RPX only	2-entry grommet		

END PLATE PREPARATION

Step #1 Determine which cable ports will be used.




If buffer tubes are routed in bottom storage brackets, use cable ports 2 & 3. If ribbon cables are being used or buffer tubes are routed in side storage brackets, use cable ports 1 & 4.

CABLE PREPARATION

Step #2 Measure the cable to determine the diameter and hole location to use in the grommet.



Step #3 If using cut cable, insert cable through grommet. If your application requires express/balloon/ring cut cables, see **Step 5 for grommet slitting procedure.**

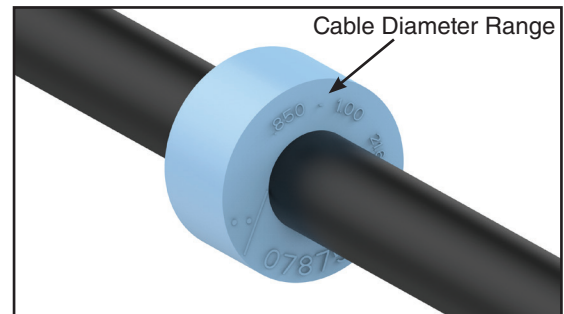


Step #4 Installing Figure 8 Style Cables and Cables with Tracer Wires


Remove tracer wire or ground wire from the portion of the cable that will be positioned into the grommet and insert cable into grommet.

Remove any burrs left on the cable caused by separating the tracer wire from the sheath.

Cable with Tracer Wire




NOT CORRECT
INSTALLATION



CORRECT
INSTALLATION

Figure 8 Style Cable




NOT CORRECT
INSTALLATION




CORRECT
INSTALLATION

Step #5 Grommet Slitting – If slitting is required, lay grommet on a stable flat surface. Position utility knife with the cutting edge against the top surface and cut through grommet. **Consult the grommet chart on page 3 for slitting locations of all grommets.**

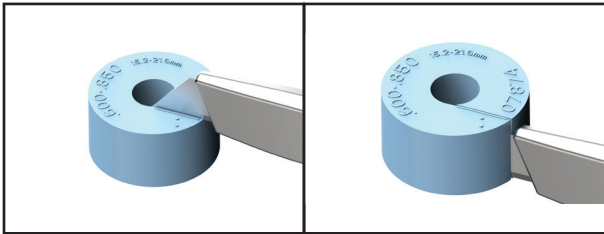



PLP TIP: Use a pen to sketch slitting lines on top surface of grommet prior to cutting.

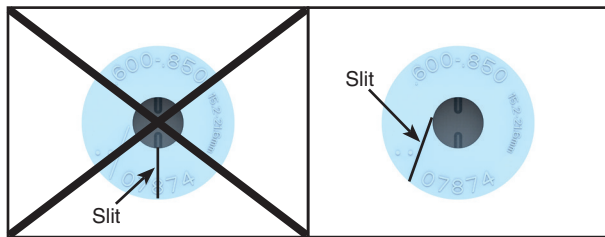

**NOT CORRECT
SLITTING ANGLE**

**CORRECT SLITTING
ANGLE**

Step #6 Prepare loose tube/buffer tube or unitube/ribbon cable(s) for cut applications.

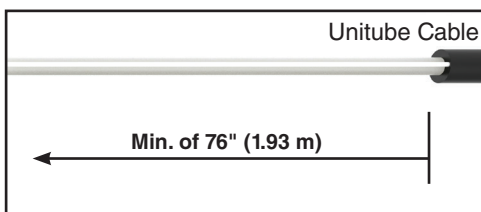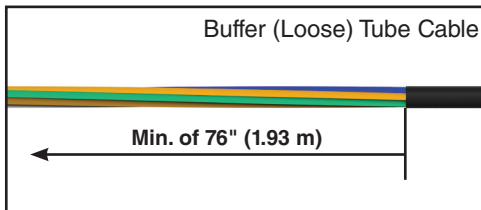



Minimum Sheath Opening for Cut Cable Applications

Buffer/ Loose Tube Cable	76" (1.93 m)
Unitube Cable	76" (1.93 m)

PLP TIP: Leave about 8" (203 mm) of strength member to trim later.

Cable Sheath Opening for Applications Where Fiber is NOT Dedicated to the Splice Point

Step #7 Prepare loose tube/buffer tube or unitube/ribbon cable(s) for mid sheath applications (Express/Balloon/Ring Cut).

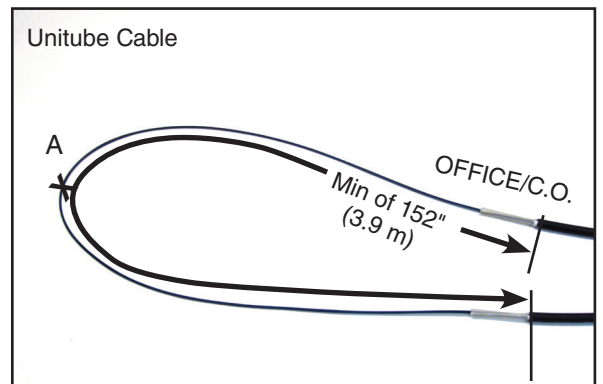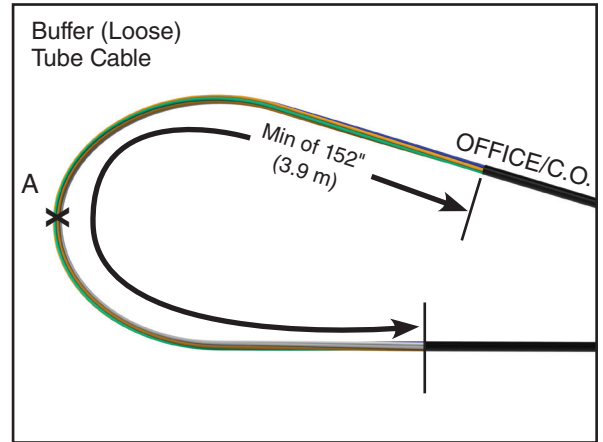

NOTE: When expressing ribbons in the slack basket of the closure at this measurement, the maximum number of ribbons that can be expressed is 24 ribbons (288 fibers).



For Applications Where Fiber is NOT Dedicated to the Splice Point

Sheath Opening	Max. of 152" (3.9 m)
Buffer Tube Cable Cut Location	A (see 1st image)
Unitube Cable Cut Location	A (see 2nd image)

PLP TIP: Leave about 8" (203 mm) of strength member to trim later.

Cable Sheath Opening for Applications Where Fiber is Dedicated to the Splice Point

Step #8 Prepare loose tube/buffer tube or unitube/ribbon cable(s) for mid sheath applications (Express/Balloon/Ring Cut).

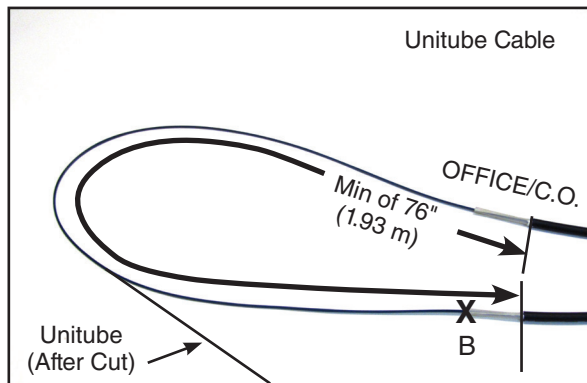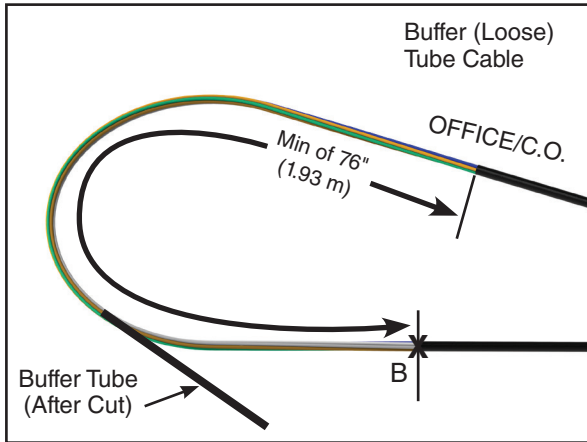


NOTE: When expressing ribbons in the slack basket of the closure at this measurement, the maximum number of ribbons that can be expressed is 24 ribbons (288 fibers).

For Applications Where Fiber is Dedicated to the Splice Point	
Sheath Opening	Min. of 76" (1.93 m)
Buffer Tube Cable Cut Location	B (see 1st image)
Unitube Cable Cut Location	B (see 2nd image)

PLP TIP: Leave about 8" (203 mm) of strength member to trim later.

Cable Sheath Opening for Window Cut Applications

Step #9 Prepare loose tube/buffer tube cable(s) for expressed fiber (buffer tube window cut).

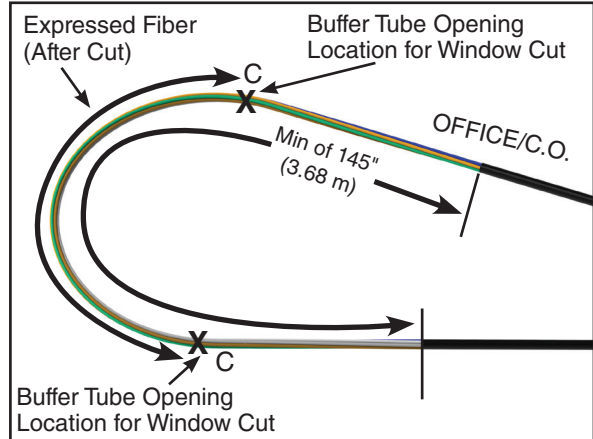


For Window Cut Applications

Buffer Tube Length	32" (0.81 m)
Expressed Fiber Length	81" (2.06 m)
Sheath Opening	145" (3.68 m)
Buffer Tube Opening Location	C (see image above)


PLP TIP: Leave about 8" (203 mm) of strength member to trim later.

Core Tube Opening for Unitube Cables

Step #10 Prepare Central/Buffer Tube(s) for Unitube/Ribbon Cable Applications.


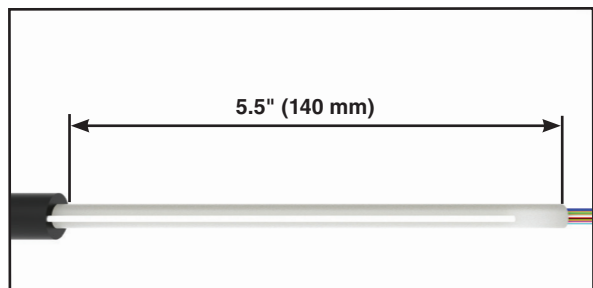


Step #11 If the cable contains aramid yarn, braid roughly 3" (7.2 cm) of the aramid yarn.

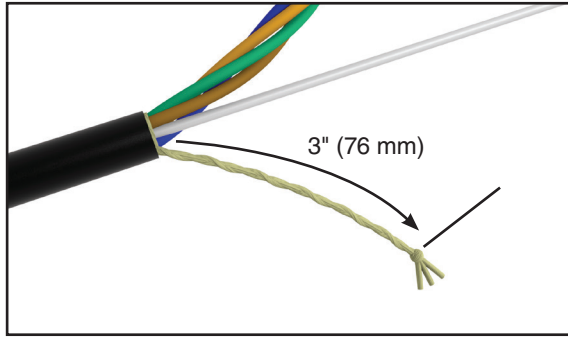


Attaching Standard Buffer Tube Cable to Strength Member Bracket


Step #12 Align the sheath opening with the end of the slot of the strength member bracket as shown below.

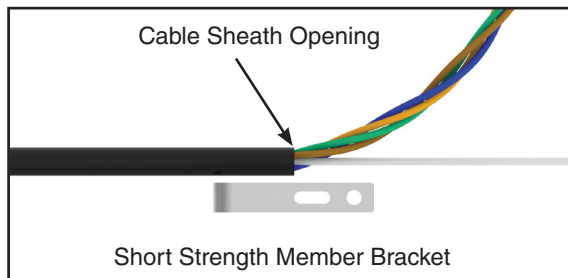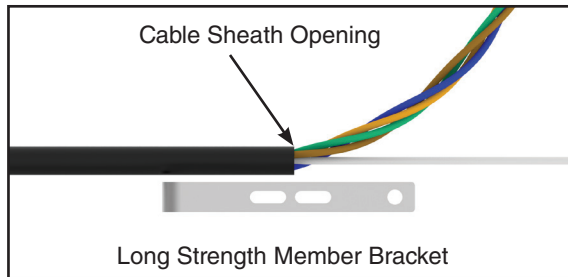


Step #13 Trim the strength members flush with the end of the strength member bracket(s).

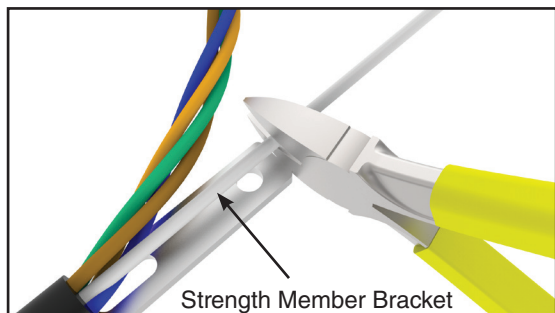


Step #14 Install the cap on the strength member bracket and loosely secure it to the bracket with the small nut provided.

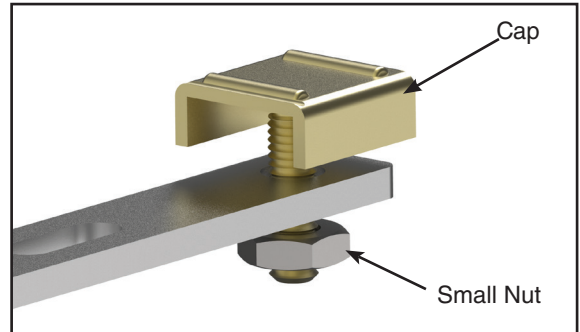


Step #15 Position strength members under the cap of the strength member bracket(s).

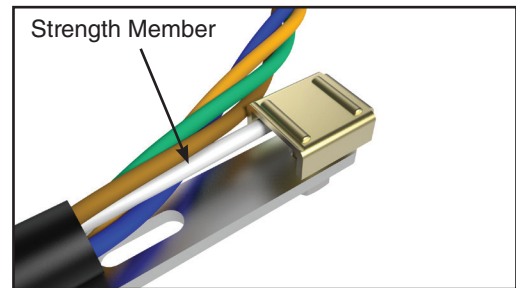



Step #16 If the cable contains aramid yarn, wrap the braided aramid yarn around the stud of the cap as shown.

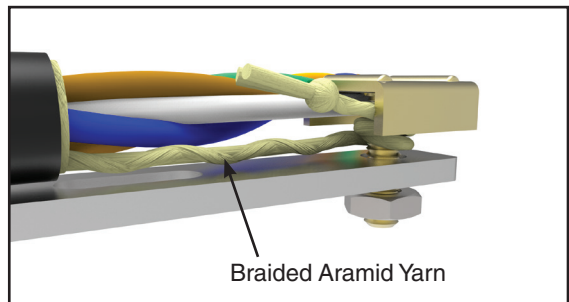

Step #17 Tighten the nut of the cap to secure the strength members under the cap.

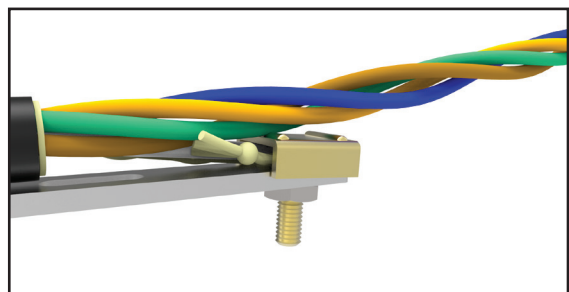


Step #18 Secure the cable to the strength member bracket(s) with a hose clamp.

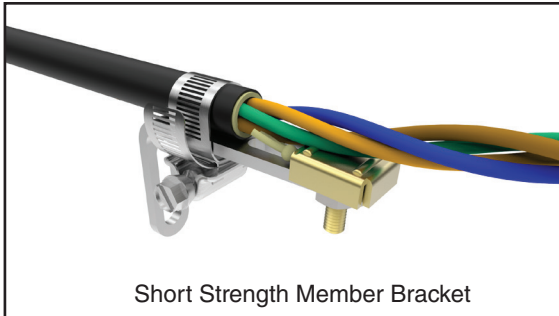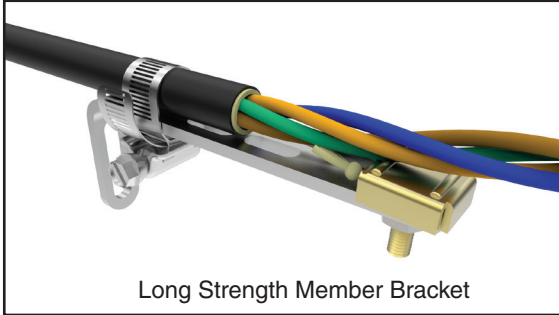


Attaching Shielded Cable to Strength Member Bracket

Step #19 Install the shield connector on the cable and insert the stud of the shield connector through the slot of the strength member bracket.


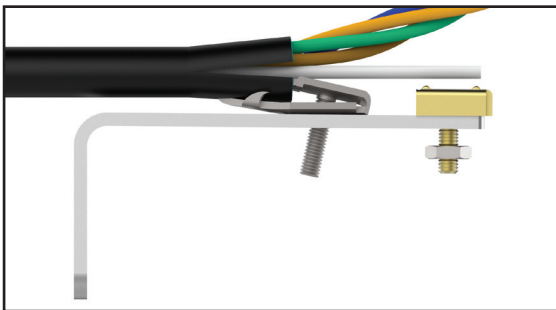


Follow standard company practices when applying the shield connector to the cable.

Step #20 Secure the shield connector to the strength member bracket with the nut and secure the cable strength members under the cap of the strength member bracket.

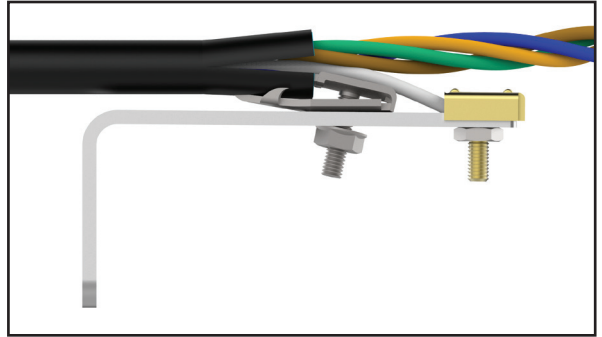


Step #21 Secure the shielded cable to the strength member bracket with the hose clamp.

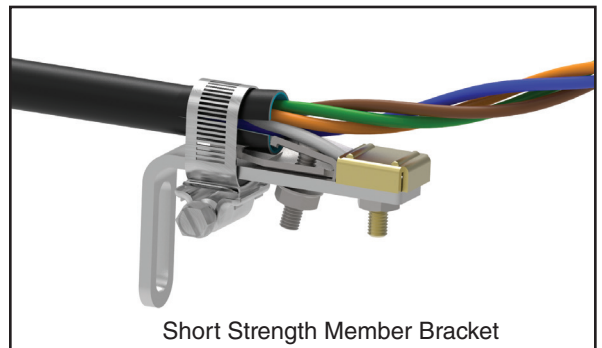
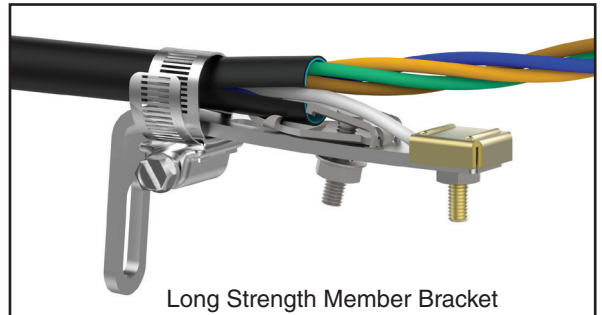


Securing Cable with Large Central Strength Member to Strength Member Bracket


Step #22 Align the sheath opening with the end of the slot of the strength member bracket as shown below.

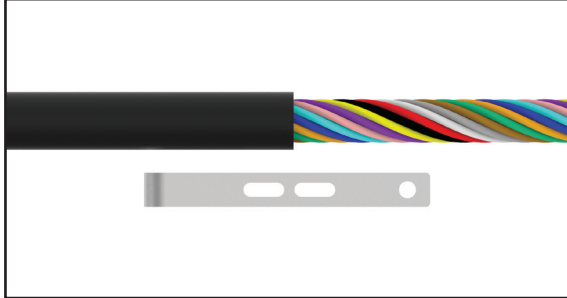



Step #23 Assemble the adapter to the bracket as shown below.

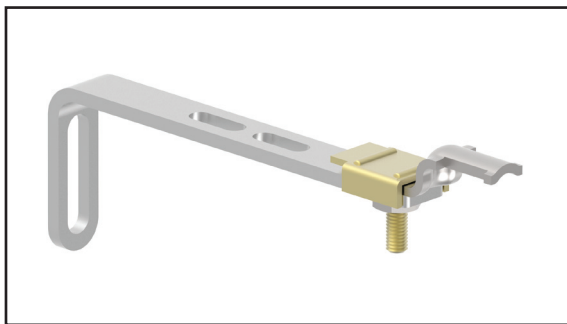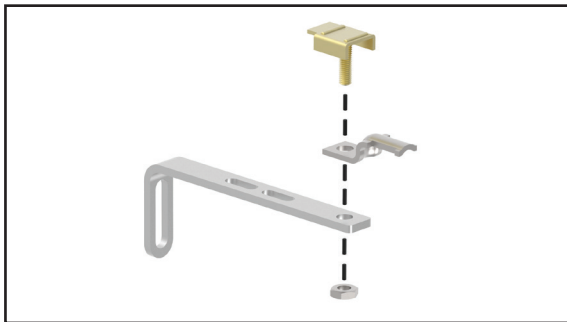


Step #24 Trim the large strength member 1/2" (12.7 mm) past the end of the adapter. Secure the cable strength member to the adapter with the small hose clamp provided.

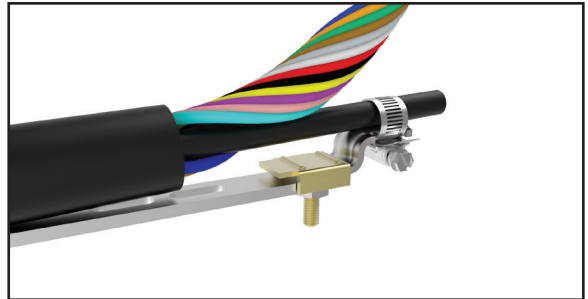

Step #25 If the cable contains aramid yarn, braid roughly 3" (76 mm) of it and wrap it around the stud of the cap as shown below. Tighten the nut of the cap to secure the the yarn under the cap.

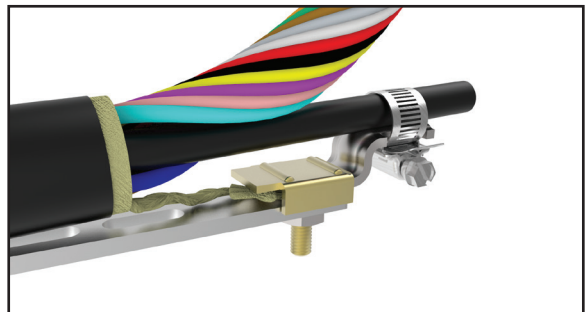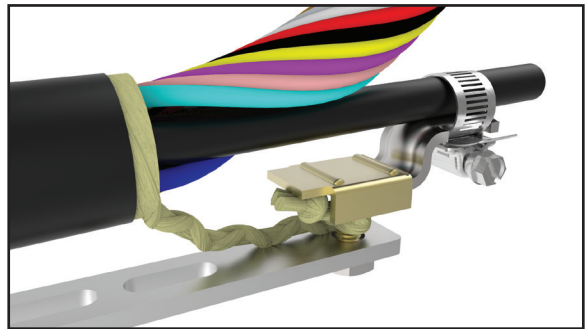


Step #26 Secure the cable to the strength member bracket with the hose clamp provided.

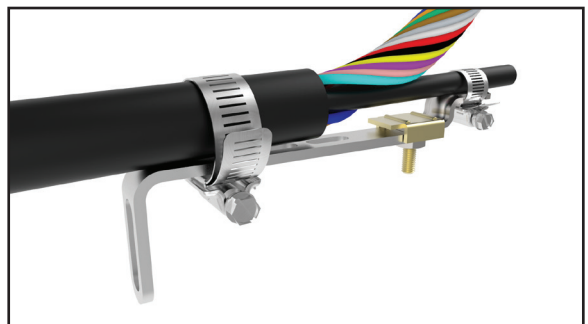


Attaching Unitube Cable to Strength Member Bracket

Step #27 Align the sheath opening of each cable with the end of the slot of the strength member bracket and trim the strength members of each cable flush with the end of the bracket as shown below.


NOTE: Only two strength members are needed. Remaining strength members can be cut off.

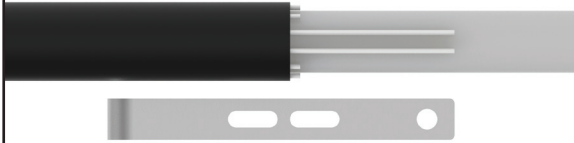


Step #28 Install the cap on the strength member bracket and loosely secure it to the bracket with the small nut provided.

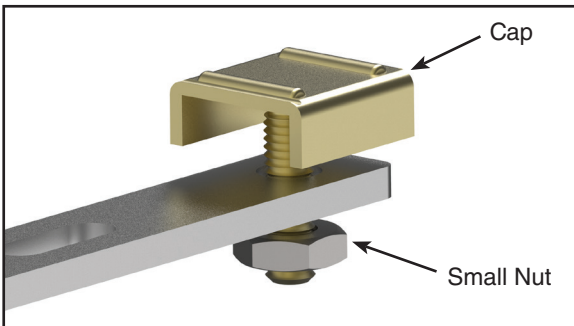



Step #29 Position the strength members under the cap of the strength member bracket.

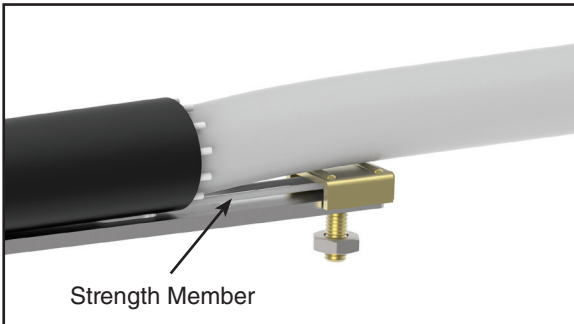

Step #30 If the cable contains aramid yarn, wrap the yarn around the stud of the cap as shown below.

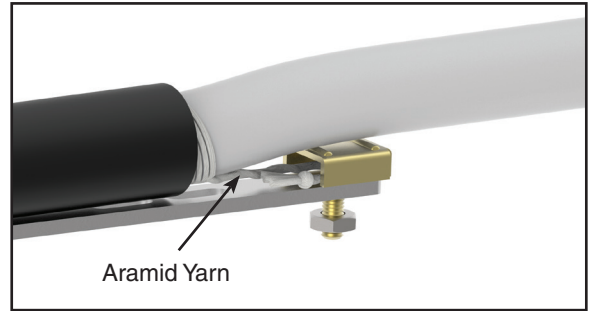

Step #31 Tighten the nut of the cap to secure the strength members or the aramid yarn under the cap.

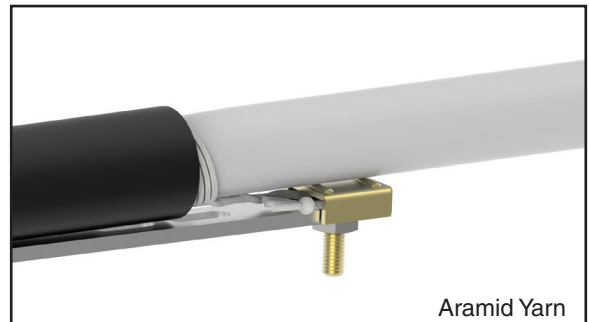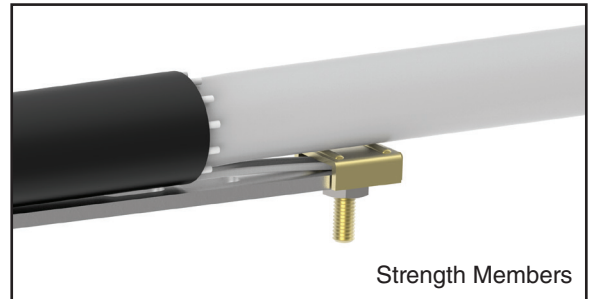


Step #32 Secure the cable to the strength member bracket with the hose clamp.




Securing Armored Cable with Strength Members Embedded in the Cable Sheath to Strength Member Bracket

Step #33 Cut off one set of strength members as close to the cable sheath opening as possible.

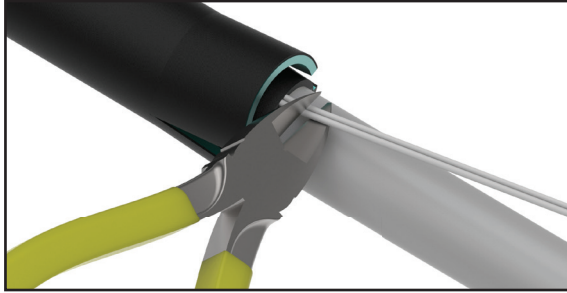

Step #34 Install the shield connector onto the cable as shown below. **NOTE: PLP recommends using a 3M 4460-D/FO Fiber Optic Shield Connector (Catalog Number: 80803989) for shielded cable applications.**

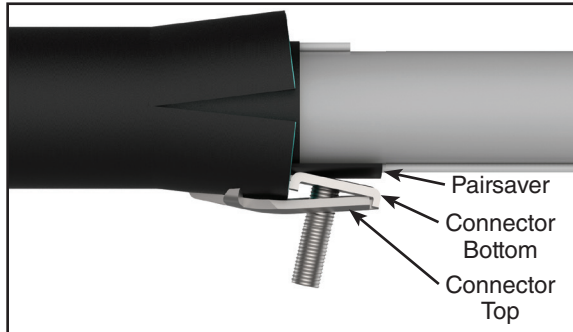


Follow your standard company practices when applying the shield connector to the cable.


Step #35 Insert the stud of the shield connector through the slot closest to the end of the strength member bracket and push the stud to the back of the slot (away from the end of the bracket).




Step #36 Trim the other set of strength members flush with the end of the strength member bracket.

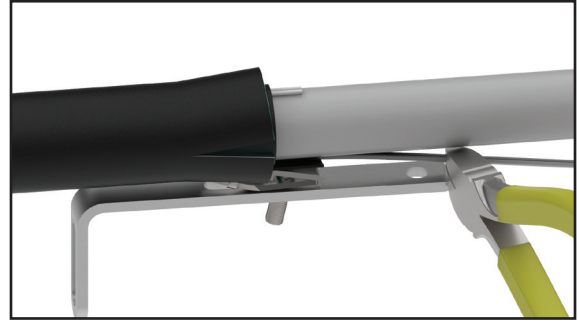


Step #37 Install the cap on the strength member bracket and loosely secure it to the bracket with the small nut provided.

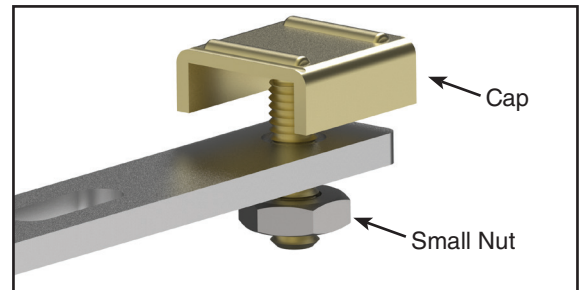


Step #38 Re-insert the stud of the shield connector through the slot of the strength member bracket and capture the strength members of the cable under the cap of the bracket.

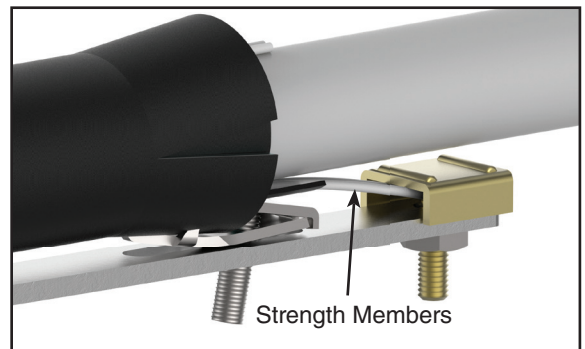

Step #39 Secure the shield connector to the strength member bracket with the nut provided with the shield connector and secure the cable strength members by tightening the nut of the cap.

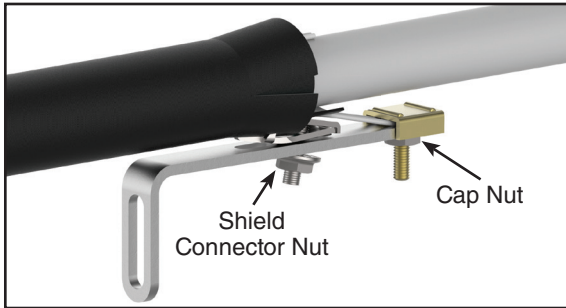


Step #40 Secure the shielded cable to the strength member bracket with the hose clamp.


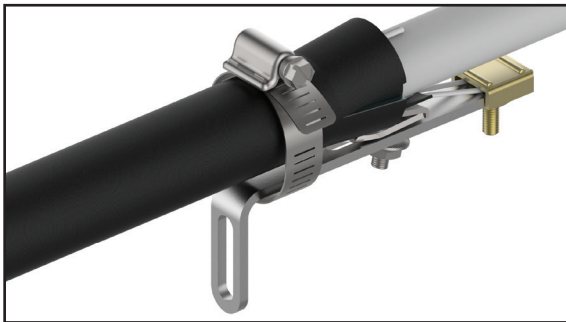


Cable Installation and Routing

Step #41 Lubricate the outer surface of the grommets. Spread lubricant evenly around the outer surface.

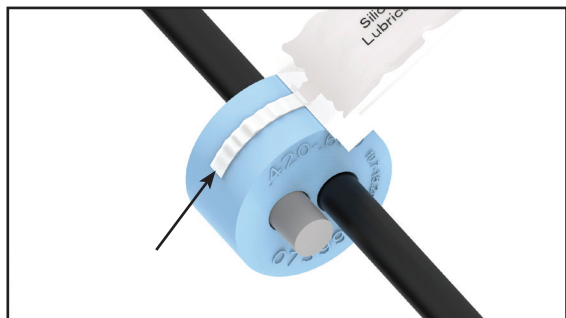


Step #42 Position the grommets in the end plate slots.

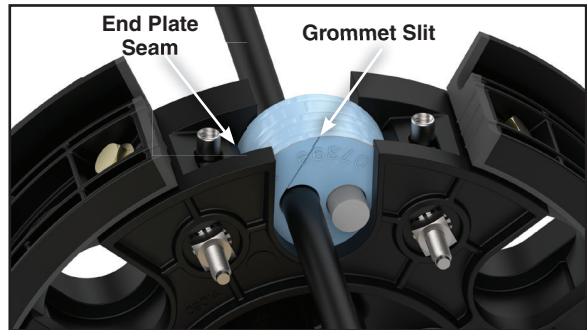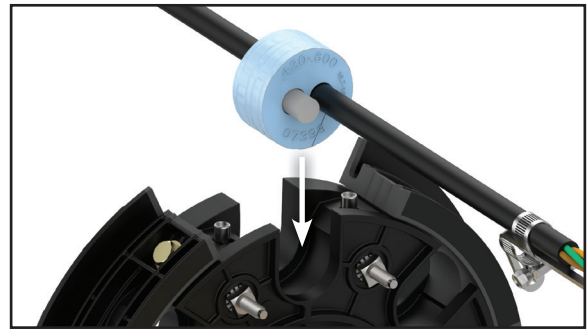


DO NOT align grommet slit with end plate seam.

Step #43 Position the slot of the strength member bracket leg over the stud and pull back the cable.

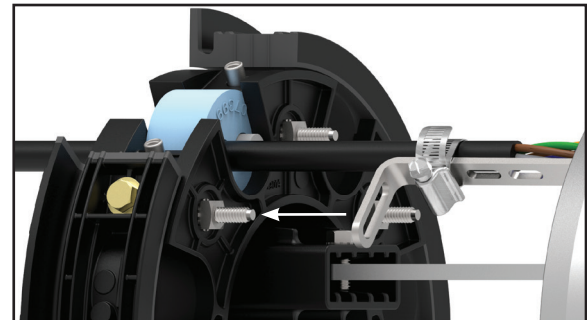


Step #44 Install the strength member bracket on the stud. Install the lock washer and nut against the bracket, but do not tighten fully, so the bracket can slide as the grommet is inserted.

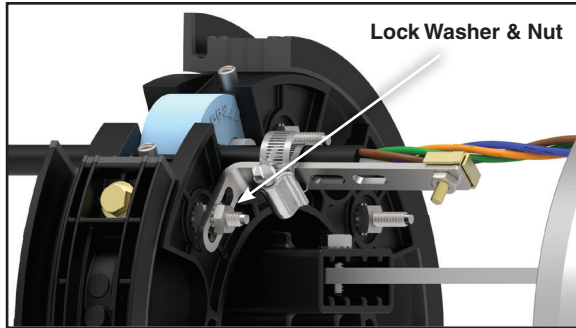

Step #47 Complete end plate assembly.




Step #45 Install grommets with plugs in any unused cable ports.

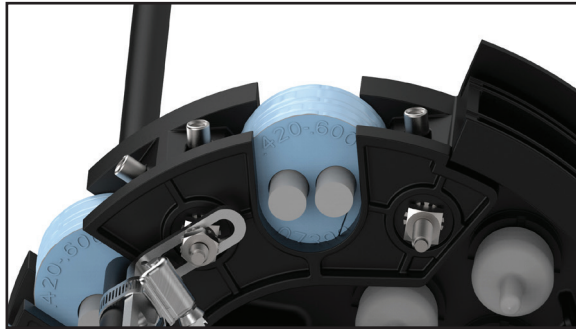

Buffer Tube Applications

Step #48 Route buffer tubes to be expressed in the side storage brackets as shown.

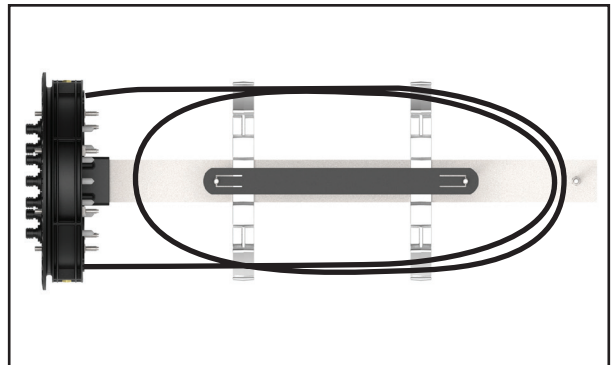

Step #46 Install the end caps and secure with hex bolts.





NOTE: Tighten bolts by hand evenly until end cap is fully seated (DO NOT USE POWER TOOLS TO TIGHTEN BOLTS).

When using a can wrench or nut driver, the installed torque is 35 to 40 in-lbs.


NOTE: TIGHTEN ALL UNUSED END CAPS.

IMPORTANT: TIGHTEN DOWN THE STRENGTH MEMBER BRACKET AFTER THE CAPS ARE TIGHTENED.

Step #49 Route and store buffer tubes to be spliced in the storage brackets. If routing in side storage brackets, see Step #65 for installation of retainer clips.

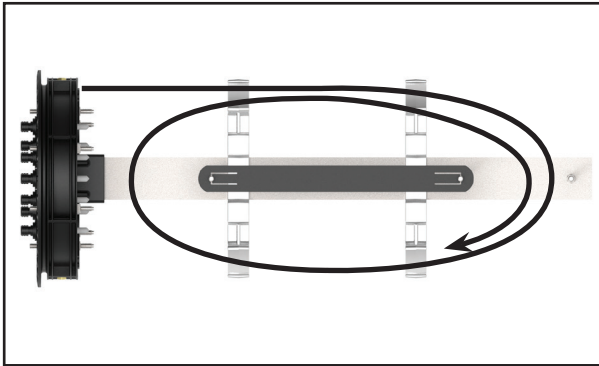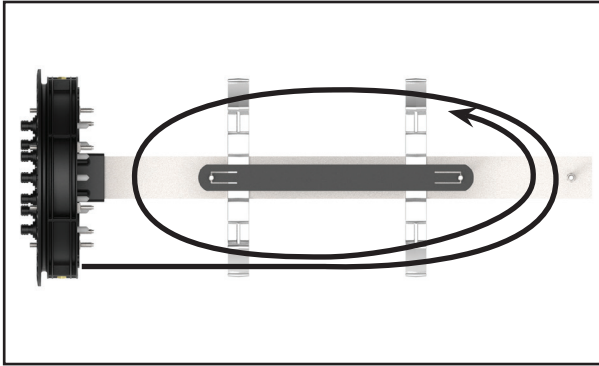


Step #50 Route buffer tube(s) to splice tray(s) and secure.

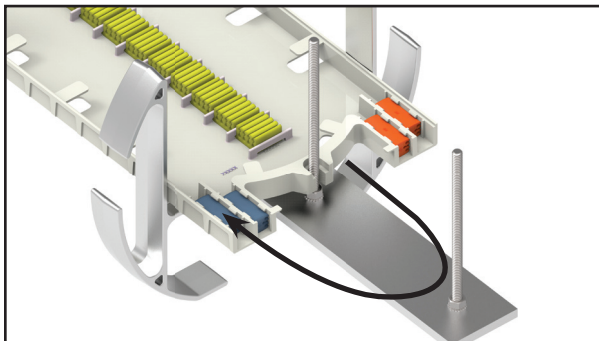


Unitube Applications


Step #51 Route and secure the central tube of unitube cables to the slack basket.

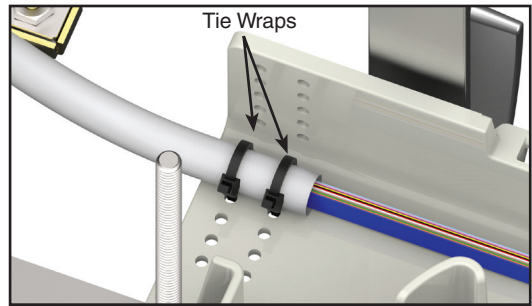


Step #52 Route feeder fibers or ribbons within slack basket.

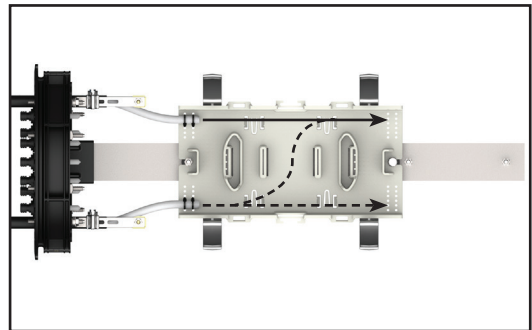


Step #53 Install organizer clips in slack basket and route expressed fibers or ribbons under clips.

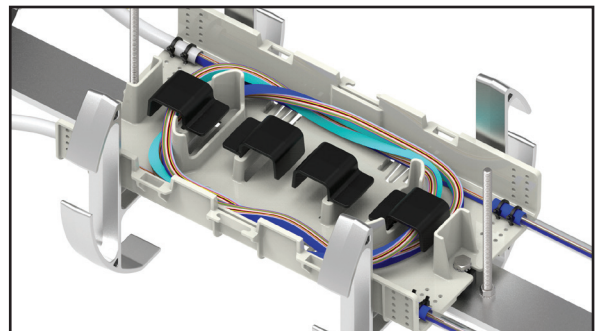


Step #54 Insert fibers or ribbons to be routed to splice tray(s) into transport tube(s) and secure tubes to slack basket.

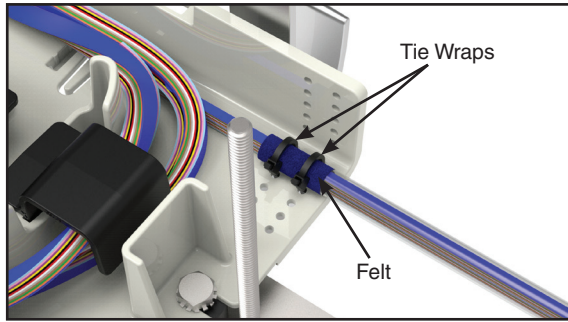

Step #55 Install cover on slack basket.

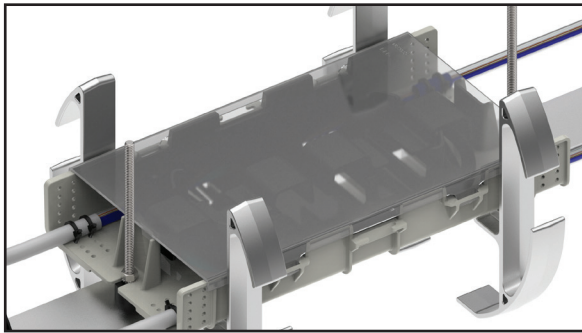


Step #56 Route transport tube(s) to splice tray(s) and secure.

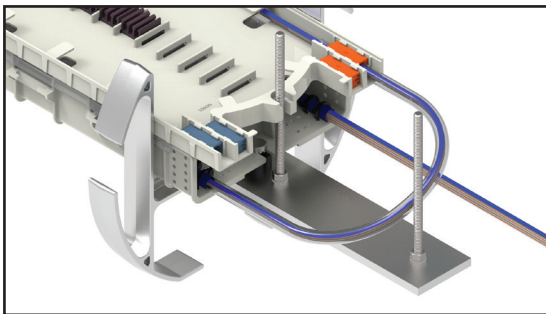


Pigtail Assembly Installations


Step #57 Measure and mark pigtail. Remove the pigtail jacket and aramid yarn beyond this mark.

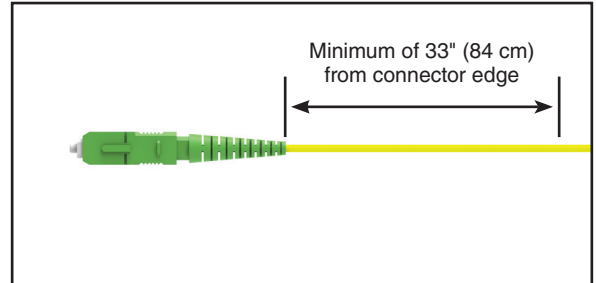

Step #58 Install pigtails into LITE-GRIP® Sleeve.

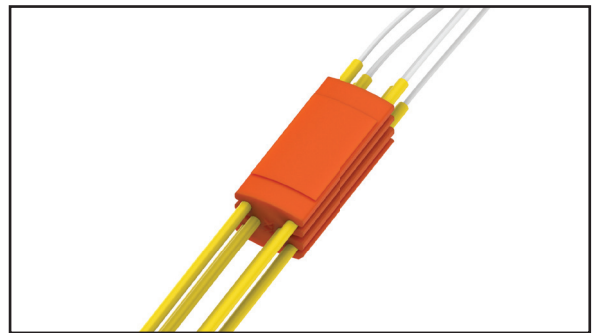


Step #59 Install LITE-GRIP® Sleeve with pigtails into splice tray.

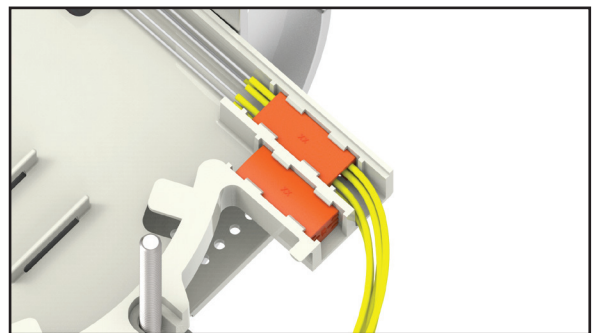


Splice Tray Management

Step #60a Routing incoming fibers in single fusion splice tray.

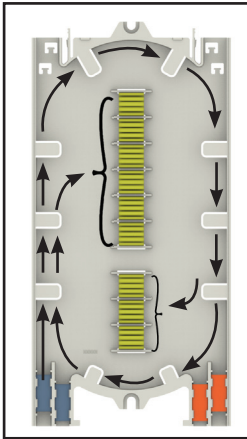

Top: Splices 1-48
Bottom: Splices 49-72


Step #60b Routing outgoing fibers in single fusion splice tray.

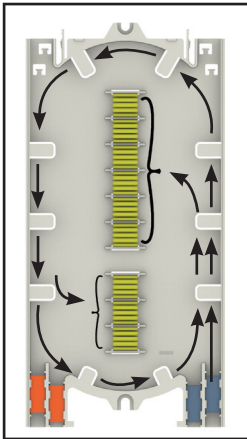

Top: Splices 1-48
Bottom: Splices 49-72


Step #61a Routing incoming fibers in mass fusion splice tray.

Slack Storage on Splice Tray

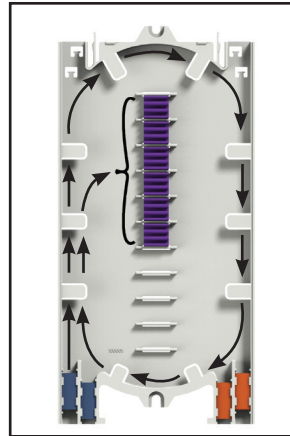

Splices
1-18


Slack Storage in Slack Basket

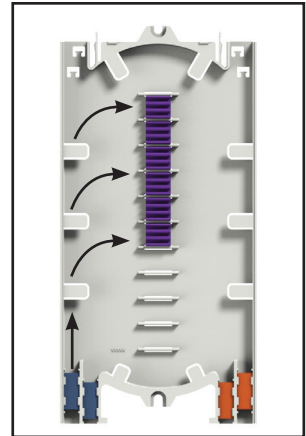

Splices
1-18


Step #61a Routing outgoing fibers in mass fusion splice tray.

Slack Storage on Splice Tray

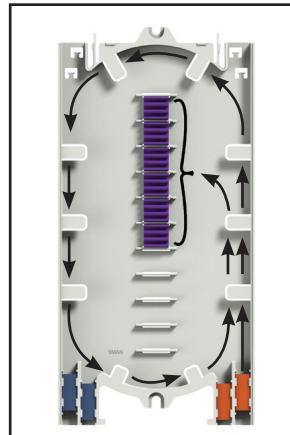

Splices
1-18



Slack Storage in Slack Basket

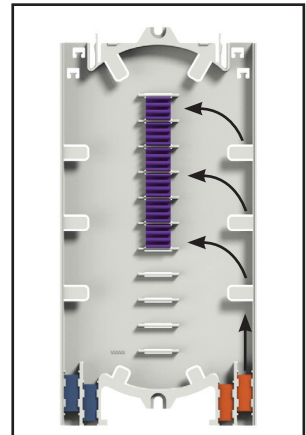

Splices
1-18


Step #62 Splice incoming ribbons to outgoing ribbons per your accepted company practices.

Step #63 Secure splice tray(s) with hold down strap.

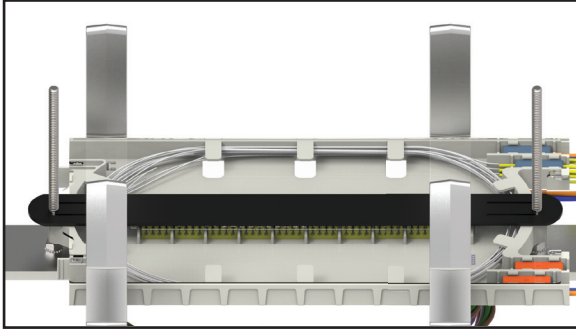
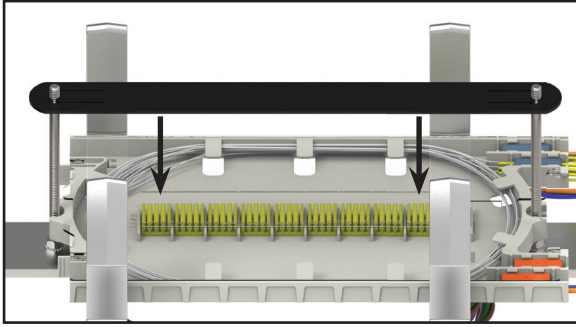


Pigtail Routing



Step #64 Route pigtails to end plate as shown.

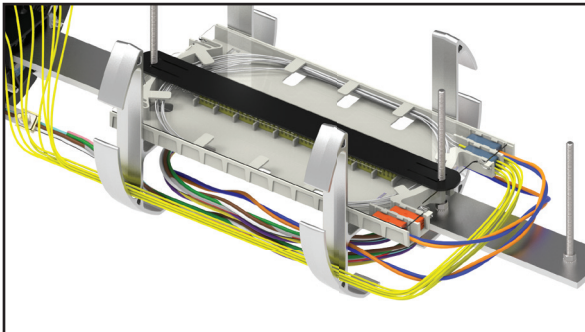

Step #65 Install pigtail connectors into adapters.

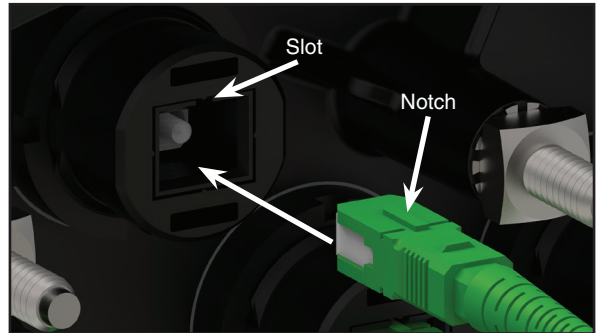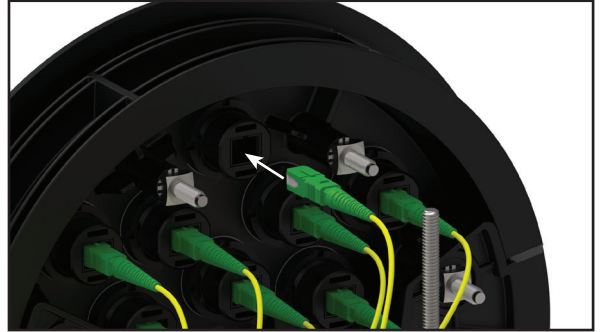


Step #66 Secure the cables in the side storage brackets with the retainer clips. To install the retainer clip, position the bottom slot of the retainer clip onto the bottom portion of the side storage bracket. Tilt the retainer clip forward until the top portion of the side storage bracket snaps into the top slot of the retainer clip.

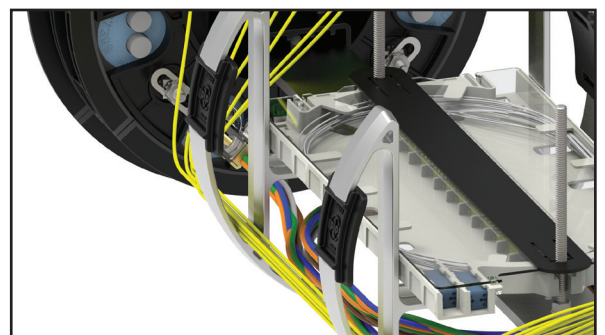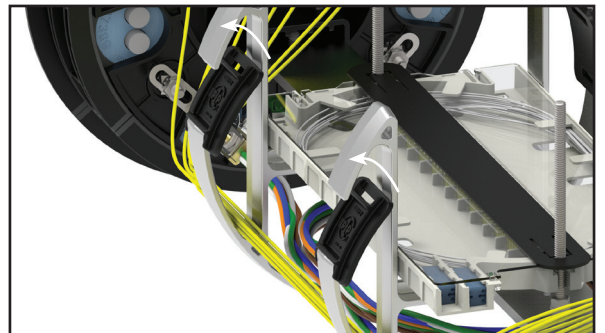



Dome Preparation & Installation

Step #67 Re-tighten all end cap bolts (step #46) to assure that the end caps are fully seated. When using a can wrench or nut driver, the installed torque is 35 to 40 in-lbs.

Step #68 Lubricate all surfaces around gasket with silicone lubricant to assure easy assembly and closure re-entry.

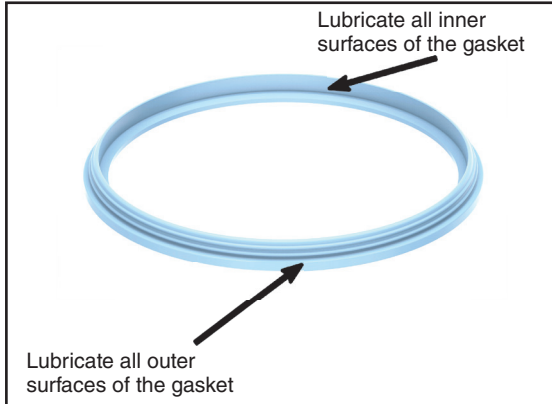

Step #69 Slide the end plate gasket onto the end plate and press into the groove.

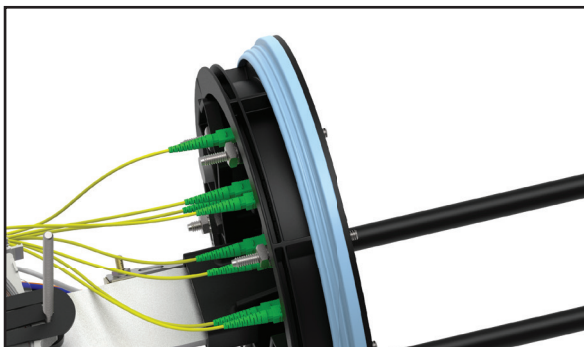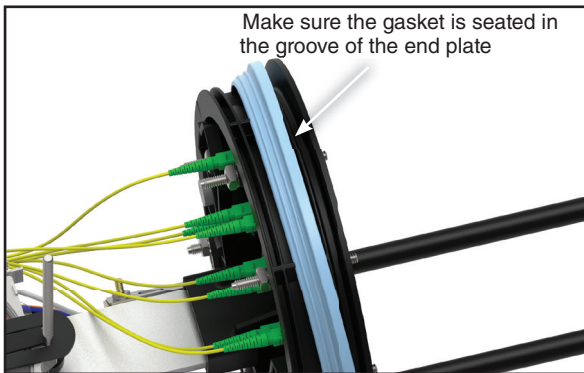


Step #70 Position the dome over the end plate.




Step #71 Install the dome collar.





Make sure that the lip of dome is captured underneath the collar before securing the latch.

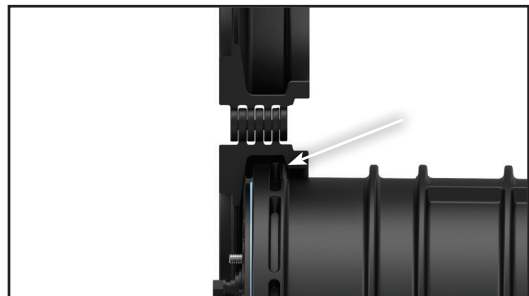

Step #72 Fasten the latch and lock the collar with the pin.

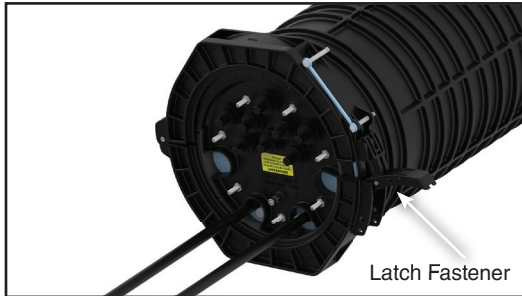


Step #73 Install drop cable connectors into adapters.

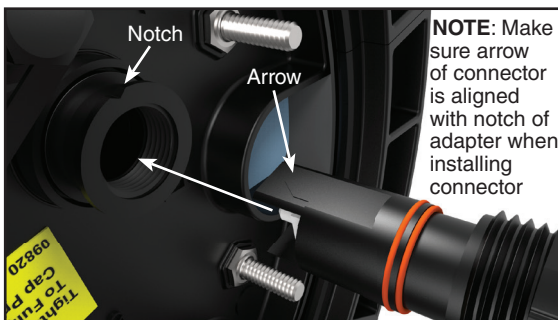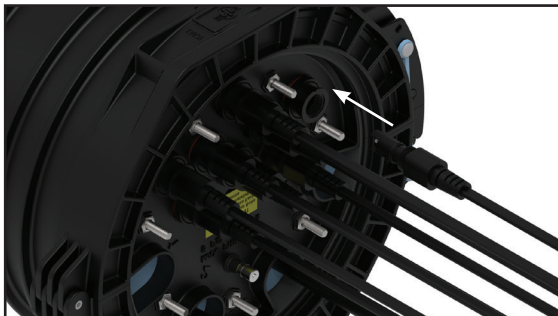

Flash Test Procedure

Step #74 Remove the cap from the air valve of the end plate.

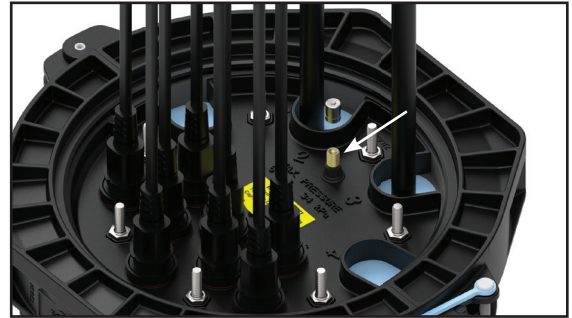


Step #75 Pressurize closure up to a max of 5 psi.



Step #76 Spray all the sealing surfaces of the dome end plate with a soap/water solution to determine if the end plate has been assembled properly.



Step #77 Release the pressure in the closure using the bump on the top of the air valve cap.

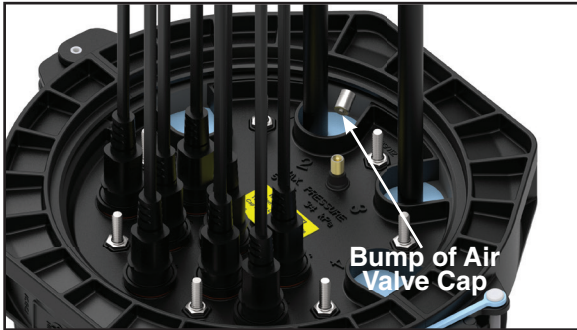


Aerial Mounting Options


Step #78a For 9.5" Dome Strand Mount Aerial Offset Bracket Kit (PLP Catalog Number: 8004037) and 9.5" Dome ADSS Mount Aerial Offset Bracket Kit (PLP Catalog Number: 8004038).

Assemble each bug nut or ADSS clamp to each top aerial offset bracket as shown below.

Strand Clamp

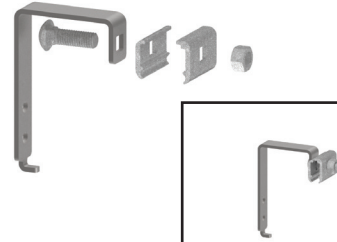


ADSS Clamp

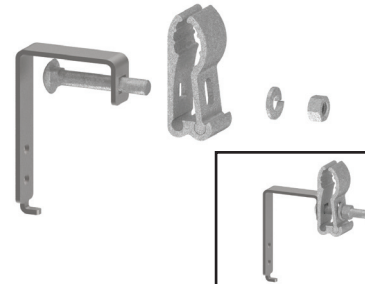

Step #78b For Taller Spacing.

Align the top aerial offset bracket with the bottom aerial offset bracket in either Position 1 or Position 2 as shown below and secure with the bolts and keps nuts provided.

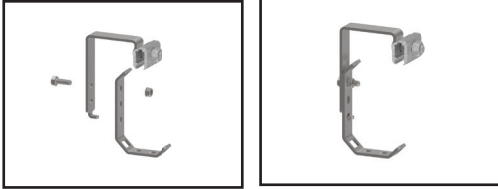


Position 1 - Strand Clamp Shown




Position 2 - Strand Clamp Shown

Step #78c For Shorter Spacing.

Align the top aerial offset bracket with the bottom aerial offset bracket in either Position 1 or Position 2 as shown below and secure with the bolts and keps nuts provided.

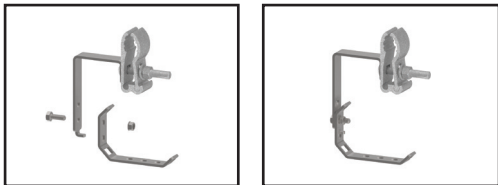


Position 1 - ADSS Clamp Shown

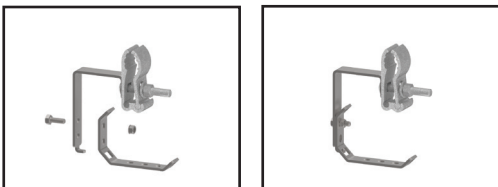


Position 2 - ADSS Clamp Shown

Step #79 Secure the tail of one hose clamp to the head of the other hose clamp.

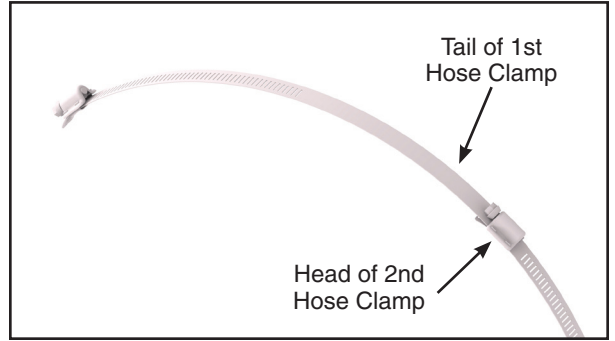


Step #80 Insert hose clamp through slots in each of the bottom aerial offset brackets.

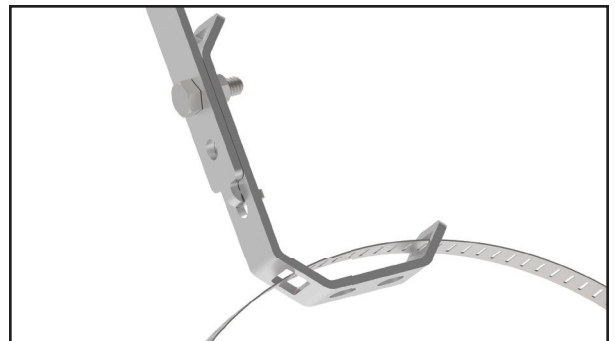

Step #81 Tighten each hose clamp around the dome.




Step #82 Bracket installed on dome closure. Second bracket also installed on opposite end of dome.

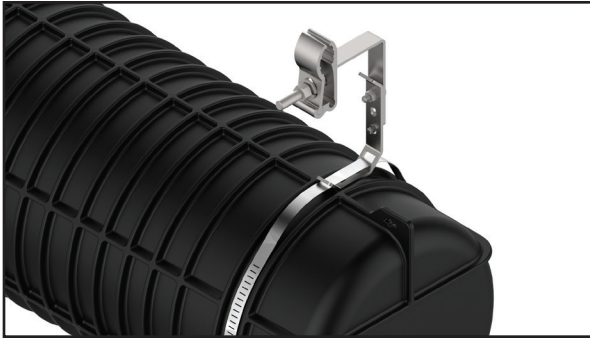


Pole/Wall Mounting Option

Step #83 For COYOTE® 9.5" Dome Pole/Wall Mount Bracket (PLP Catalog Number: 8003942)


Secure the gusset bracket to the hanger bracket with the bolts and nuts provided as shown below.

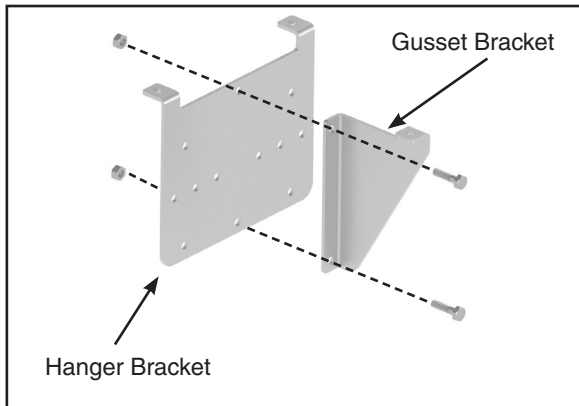



Step #84 Attach the hanger bracket to the pole mounting plate with the gusset side facing the same side as the bolt hole tabs of the pole mounting bracket.

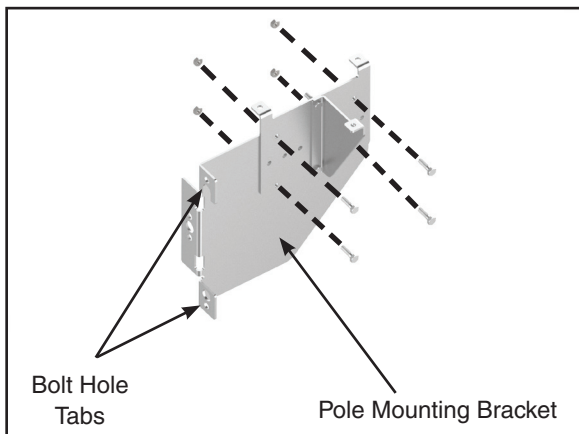

Step #85 Install the pole/wall mount bracket assembly on to the grounding studs of the end plate of the closure and secure it to the end plate with the three nuts that are provided.

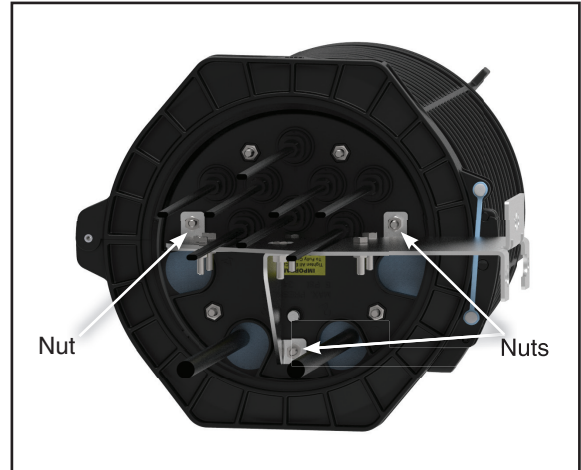


Step #86 Attach the dome pole mounting plate to a pole or a wall with either 5/8" through bolts, 1/4" lag screws, or banding.

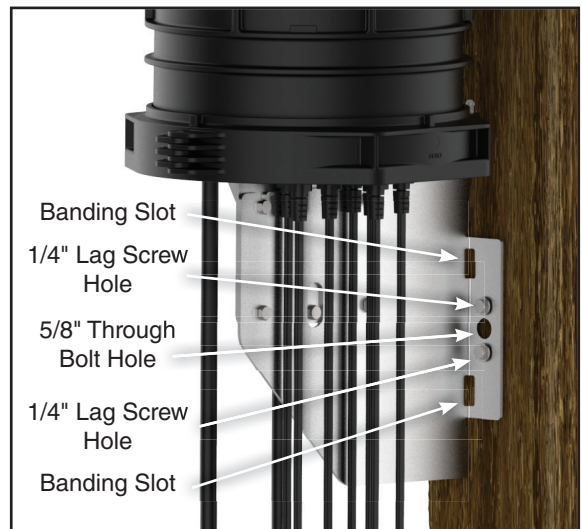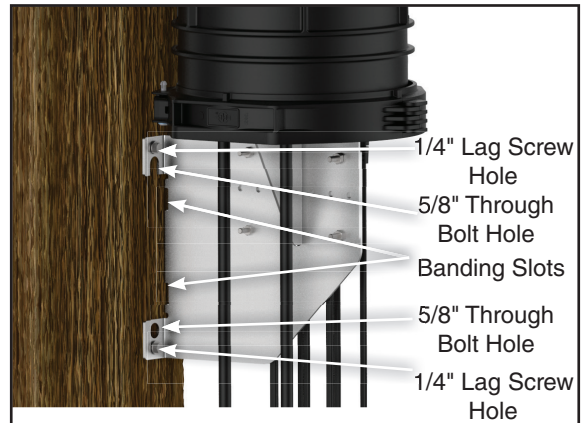


Manhole Support Bracket Option

Step #87 For COYOTE® 9.5" Dome Manhole Support Bracket (PLP Catalog Number: 8004003)


Attach a support tee to each hanger bracket using two washers, a bolt, and a nut, as shown below.

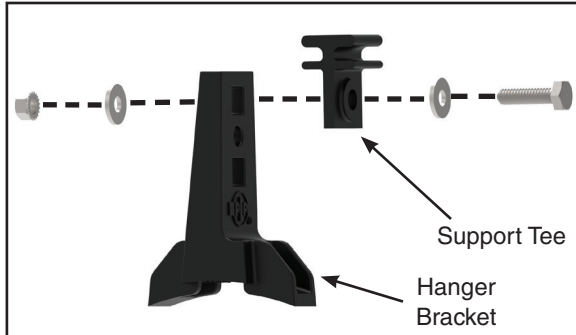


Step #88 Slide a tie wrap through each hanger bracket as shown below.

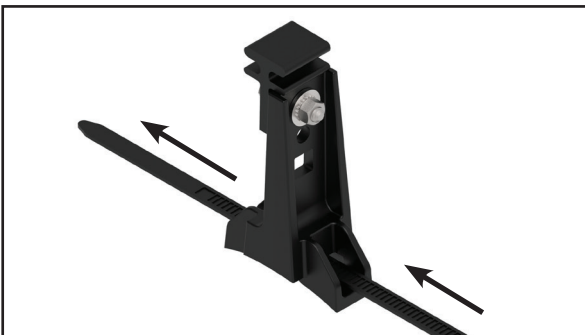


Step #89 Secure the hanger brackets to the dome with the tie wraps. Make sure the hanger brackets seat within the strap channels of the dome.

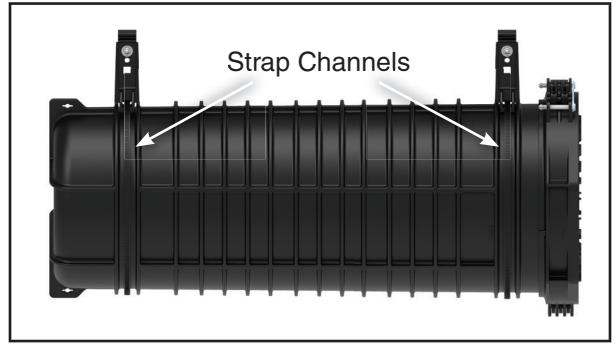

Step #90 Slide the tees of the hanger brackets within the slot of the manhole support bracket.

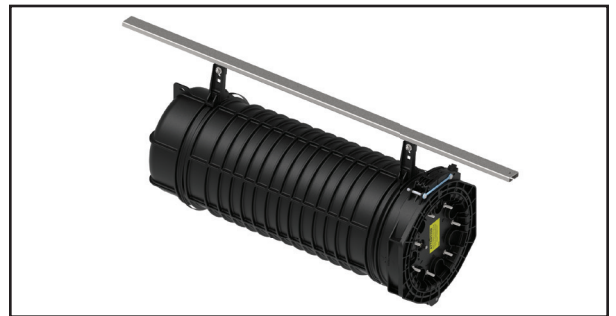

PLP TIP: The manhole support bar can then be mounted to step brackets with large stainless steel hose clamps or plastic tie wraps (Not included).

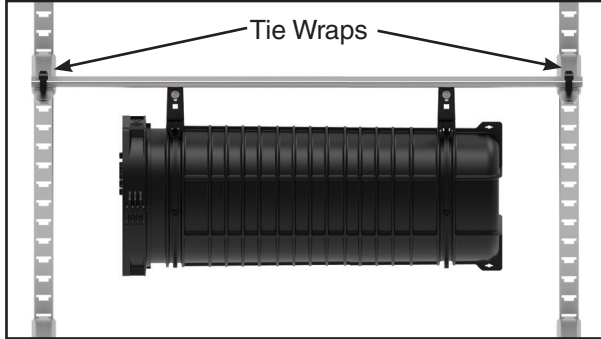

SAFETY CONSIDERATIONS

This application procedure is not intended to supersede any company construction or safety standards. This procedure is offered only to illustrate safe application for the individual.

FAILURE TO FOLLOW THESE PROCEDURES MAY RESULT IN PERSONAL INJURY OR DEATH.

Do not modify this product under any circumstances.

This product is intended for use by trained technicians only. **This product should not be used by anyone who is not familiar with, and not trained to use it.**

When working in the area of energized lines, extra care should be taken to prevent accidental electrical contact. Be sure to wear proper safety equipment per your company protocol.

For proper performance and personal safety, be sure to select the proper size PREFORMED™ product before application.

PREFORMED products are precision devices. To ensure proper performance, they should be stored in cartons under cover and handled carefully.



PREFORMED LINE PRODUCTS

P.O. Box 91129, Cleveland, Ohio 44101 • 440.461.5200 • plp.com • email: info@plp.com

SP3108-2