

PREFORMED™ Deadend Grip



For Copper Conductor (HDC)
Right Hand Lay Standard



Part Number	Conductor Stranding	Conductor Diameter (mm)	Colour Code
CFG-030	7/1.00	3.00	White
CFG-038	7/1.25	3.75	Green
CFG-043	3/2.00 7/1.35	4.25 4.05	Yellow/Green
CFG-048	7/1.63	4.89	Black
CFG-053	7/1.75 7/1.73	5.25 5.18	Purple
CFG-060	7/2.00	6.00	Yellow
CFG-075	7/2.50	7.50	Blue
CFG-083	7/2.75	8.25	White
CFG-088	19/1.75	8.75	Purple
CFG-100-CL	19/2.00 7/3.50 19/2.11	10.00 10.50 10.55	Yellow
CFG-113-CL	7/3.75	11.25	Black
CFG-117	19/2.33	11.65	Blue
CFG-125	19/2.56 37/1.75	12.80 12.25	Blue/Purple
CFG-138-CL	19/2.75	13.80	White
CFG-150-CL	19/3.00	15.00	Red
CFG-166	19/3.33 37/2.36	16.65 16.52	Orange
CFG-175-CL	37/2.50	17.50	White
CFG-183-CL	37/2.62	18.30	White
CFG-193-CL	37/2.75	19.30	White
CFG-203-CL	61/2.25	20.25	Brown
CFG-210-LT-CL	37/3.00	21.00	Red
CFG-235-CL	61/2.64	23.50	Orange
CFG-260-LT-CL	91/2.36 61/2.85	25.96 25.65	Black

Note: Cad copper conductors are left hand lay and require LHL grips.
Contact PLP for further information and other available sizes.

CL = Denotes Cabled Loop

LT = Denotes Limited Tension




Application Procedure & Safety Considerations

P R E F O R M E D L I N E P R O D U C T S

Single-Piece Grips for AAC, AAAC, ACSR, SC/AC, SC/GZ and Copper Conductors

Completely read and understand this procedure before applying products. Special attention should be given to the Safety Considerations located on the last page. We advise the reader to review those considerations now, and then again during the general review of this procedure

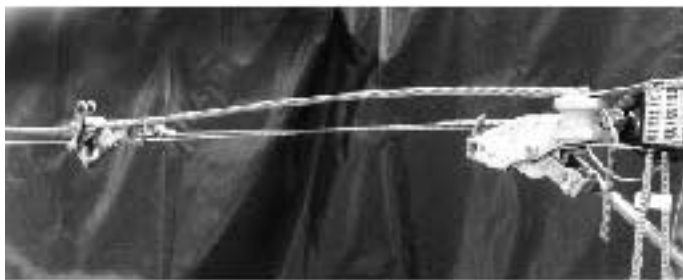

- 1) Select the correct grip for your application. Tension the conductor and fit the required insulator and thimble.



- 2) Place the grip through the thimble or around the insulator and while applying a light tension and holding the fitting legs together, lay it against the conductor.





- 3) Grasp both fitting legs evenly and apply onto the conductor at the crossover mark, making sure the gap between them is approximately the same.

NOTE: Grips are made the same lay as the conductor, therefore application rotation will be right hand for right hand conductors and vice versa for left.



- 4) Working both legs together and pulling away from the conductor, fully wrap on the fitting and snap in the ends.
- 4a) On large fittings it may be necessary to pull away from the conductor at a larger angle when applying the grip. In these cases care must be taken not to distort the fitting.




Completed Application

- 6) If difficulty is experienced applying the last couple of pitches, the legs may be further split to allow easier snapping onto the conductor. Do not use pliers or screwdrivers as this may damage the conductor strands.

THIMBLE FOR GRIPS

- 1) Loops of the Single Piece Grip are designed for use with spool insulators, clevis thimbles and other smoothly contoured fittings.
- 2) The following styles are considered as suitable.

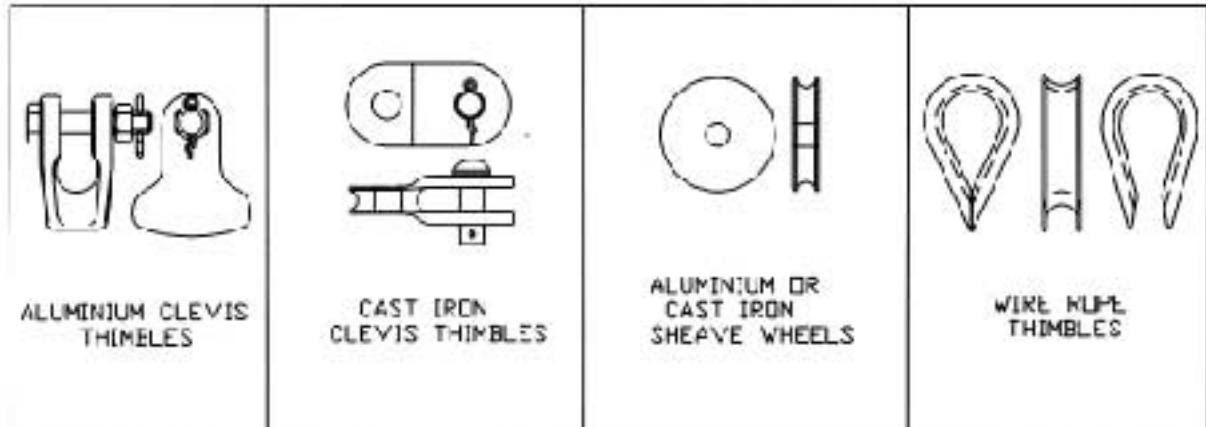

- 3) Avoid dissimilar metals that could promote galvanic corrosion (eg. copper and aluminium).
- 4) PREFORMED Grips may be applied three times on new installations, if sag adjustments are necessary.
- 5) PREFORMED Grips are not to be reused after the final application.

SAFETY CONSIDERATIONS

- 1) For proper performance and personal safety be sure to select the proper size Single-Piece Grips before application.
- 2) Single-Piece Grips are precision devices. To ensure tight assembly, they should be stored in cartons under cover and handled carefully.
- 3) This application procedure is not intended to supersede any company construction or safety standards. This procedure is offered only to illustrate safe application for the individual. Failure to follow these procedures and restrictions may result in personal injury.
- 4) When working in the area of energized lines, extra care should be taken to prevent accidental electrical contact.
- 5) This product is intended for use by trained linesmen only. This product should not be used by any one who is not familiar with and trained in the use of it.




**PREFORMED
LINE PRODUCTS
(AUSTRALIA) PTY LTD**
A.B.N. 27 004 533 877

190 Power st. Glendenning, NSW Australia 2761
PO Box 106, Glendenning Business Centre, NSW Australia 2761
Phone: (02) 8805 0000 Fax: (02) 8805 0090
intl 61 2 8805 0000 intl 61 2 8805 0090

Email: plpaus@preformed.com.au
Web: www.preformed.com.au

NOTES

- 1. ALL DIMENSIONS IN MILLIMETRES.
- 2. TOLERANCES UNLESS OTHERWISE STATED:-
 - a. HOLE DIAMETRE ±0.5mm
 - b. LINEAR DIMS. UP TO 30mm ±1.5mm
 - c. LINEAR DIMS. OVER 30mm ±5% UP TO A MAX. OF 5mm.
- 3. BRACKETED DIMENSIONS DO NOT AFFECT INTERCHANGEABILITY OR COUPLING AND ARE FOR GUIDANCE ONLY.
- 4. MATERIAL TO AS1154 GALVANIZING TO AS/NZS 4680
- 5. IDENTIFICATION MARKINGS:- PLP / MTH / YR. MANF

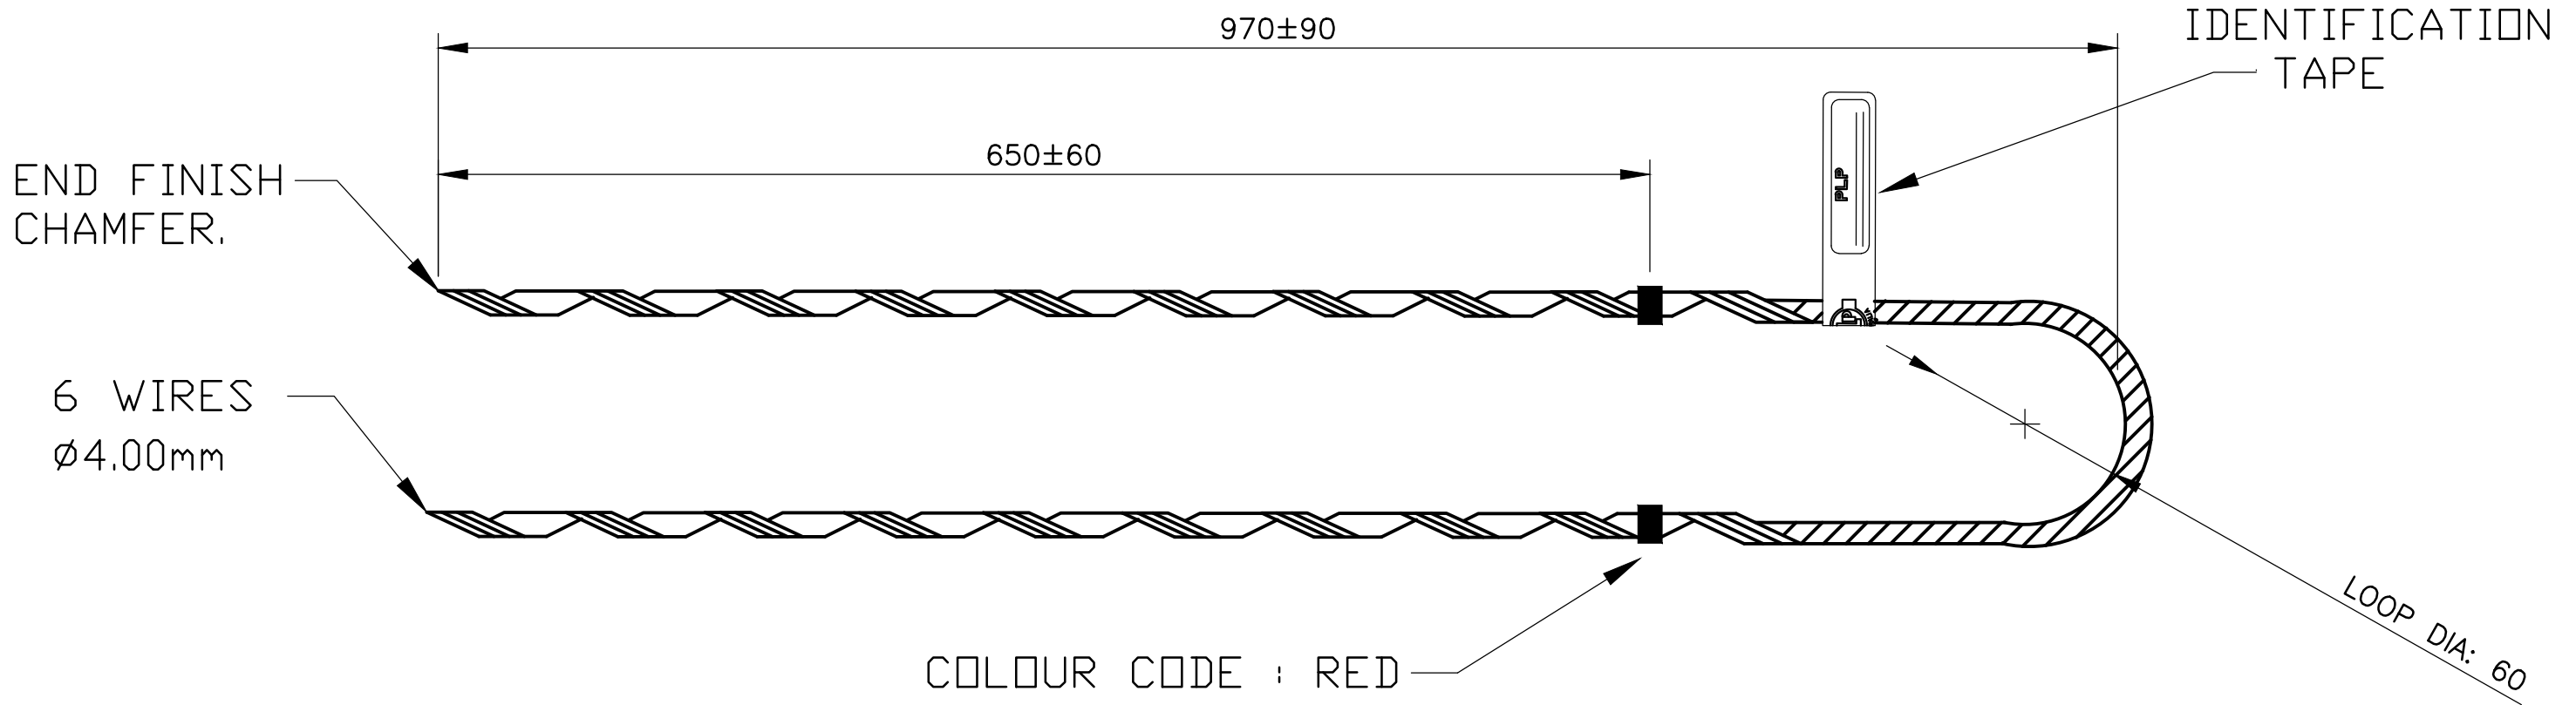

LAY : RIGHT HAND
 MATERIAL : COPPER TIN ALLOY


PRODUCT TAPE COLOUR : RED

19/3.00 HDC CABLED LOOP COLOUR RED	COPPER GRIP PART No: CFG-150-CL W/□_____ MM/YY_____
--	---

A	DK	29/8/00	C	DF	25.5.07
CHK	DM	29/8/00	CHK	DM	5.6.07
INITIAL ISSUE		A7758			
DSC NO.A4266					

THIS DRAWING IS THE EXCLUSIVE PROPERTY OF PREFORMED LINE PRODUCTS (AUSTRALIA). REPRODUCTION THEREOF IS PROHIBITED AND IS TO BE USED ONLY WITH THE EXPRESSED PERMISSION OF THE COMPANY

PART No: CFG-150-CL	
COPPER GRIP	
PASSED	PT
DATE	29.06.07

	PREFORMED LINE PRODUCTS (AUSTRALIA) PTY. LTD.	DRAWING NUMBER 056-044-RD
SCALE	N.T.S.	

PLP (AUSTRALIA) PTY LTD
ENGINEERING DEPARTMENT

DATE – 12th May 2015

TYPE TEST REPORT NO: T9564
TEST REFERENCE NO: T15/17
PAGE 1 of 4

MECHANICAL STRENGTH TYPE TEST

ON:

COPPER GRIP
19/3.00 HARD DRAWN COPPER

(PLP Aust. Part No. – CFG-150-CL)

Testing Officer:  (Jose-elmer Simeon)

Approved by:  (Florian de Celis, Compliance Manager)

Date Approved: 13/05/2015

190 Power Street Glendenning NSW 2761 AUSTRALIA
Phone: 8805 0000, INTL (612) 88050000
Fax: 8805 0090, INTL (612) 88050090

THE QUALITY SYSTEM OF PLP AUSTRALIA HAS BEEN CERTIFIED TO
AS/NZS ISO9001:2008 BY GLOBAL MARK REGISTER QUALITY ASSURANCE

Fittings and Accessories for Power and Communication.
Engineered Plastics and Extrusions.
Data Communication Products.