

# PREFORMED™ Deadend Grip



## For ACSR - Single Piece



Part Number	Conductor Stranding	Conductor Diameter (mm)	Colour Code
AWFG-053	3/4/1.75	5.25	Purple
AWFG-063-X	6/1/2.11	6.30	Yellow
AWFG-075-X	6/1/2.50 3/4/2.50	7.50	Blue
AWFG-090-X	6/1/3.00 4/3/3.00	9.00	Red
AWFG-101-X	6/1/3.35 3/4/3.37	10.05	Orange
AWFG-113-X	6/1/3.75 4/3/3.75	11.25	Black
AWFG-125-X	12/7/2.50	12.50	Blue
AWFG-143-X	6/4.75+7/1.60	14.30	Blue

## For ACSR - Multi Piece (Full Tension)




Part Number	Conductor Stranding/Name	Conductor Diameter (mm)	Colour Code
FTG-049-SB	Mullet	4.90	Green
FTG-051-SB	Herring	5.10	Green
FTG-059-SB	Goldeye	5.90	Yellow
FTG-064-SB	Flounder	6.40	Black
FTG-075-SB	Greyling	7.50	Blue
FTG-084-SB	Pickrel	8.40	White
FTG-087-SB	Lamprey	8.70	White
FTG-113	6/1/3.75	11.25	Red
FTG-117	12/7/2.34	11.70	Brown
FTG-125-AW	12/7/2.50 12/7/2.59	12.50	Blue
FTG-143	6/4.75/7/1.60	14.30	Blue
FTG-146	7/4.39/7/1.93	14.60	Blue
FTG-150	12/7/3.00	15.00	Red
FTG-155	18/1/3.09	15.54	Black
FTG-157	26/2.54/7/1.91	15.90	Blue
FTG-165	30/7/2.36	16.52	Brown
FTG-175	30/7/2.50	17.50	Blue
FTG-193	18/1/3.86	19.30	Black
FTG-210	30/7/3.00	21.00	Red
FTG-245	30/7/3.50	24.50	Purple

**Note:** -SB refers to Smooth Body conductors

**NOTES**

3. BRACKETED DIMENSIONS DO NOT AFFECT INTERCHANGEABILITY OR COUPLING AND ARE FOR GUIDANCE ONLY.

1. ALL DIMENSIONS IN MILLIMETRES.  
 2. TOLERANCES UNLESS OTHERWISE STATED:-  
 a. HOLE DIAMETRE  $\pm 0.5\text{mm}$   
 b. LINEAR DIMS. UP TO 30mm  $\pm 1.5\text{mm}$   
 c. LINEAR DIMS. OVER 30mm  $\pm 5\%$  UP TO A MAX. OF 5mm.

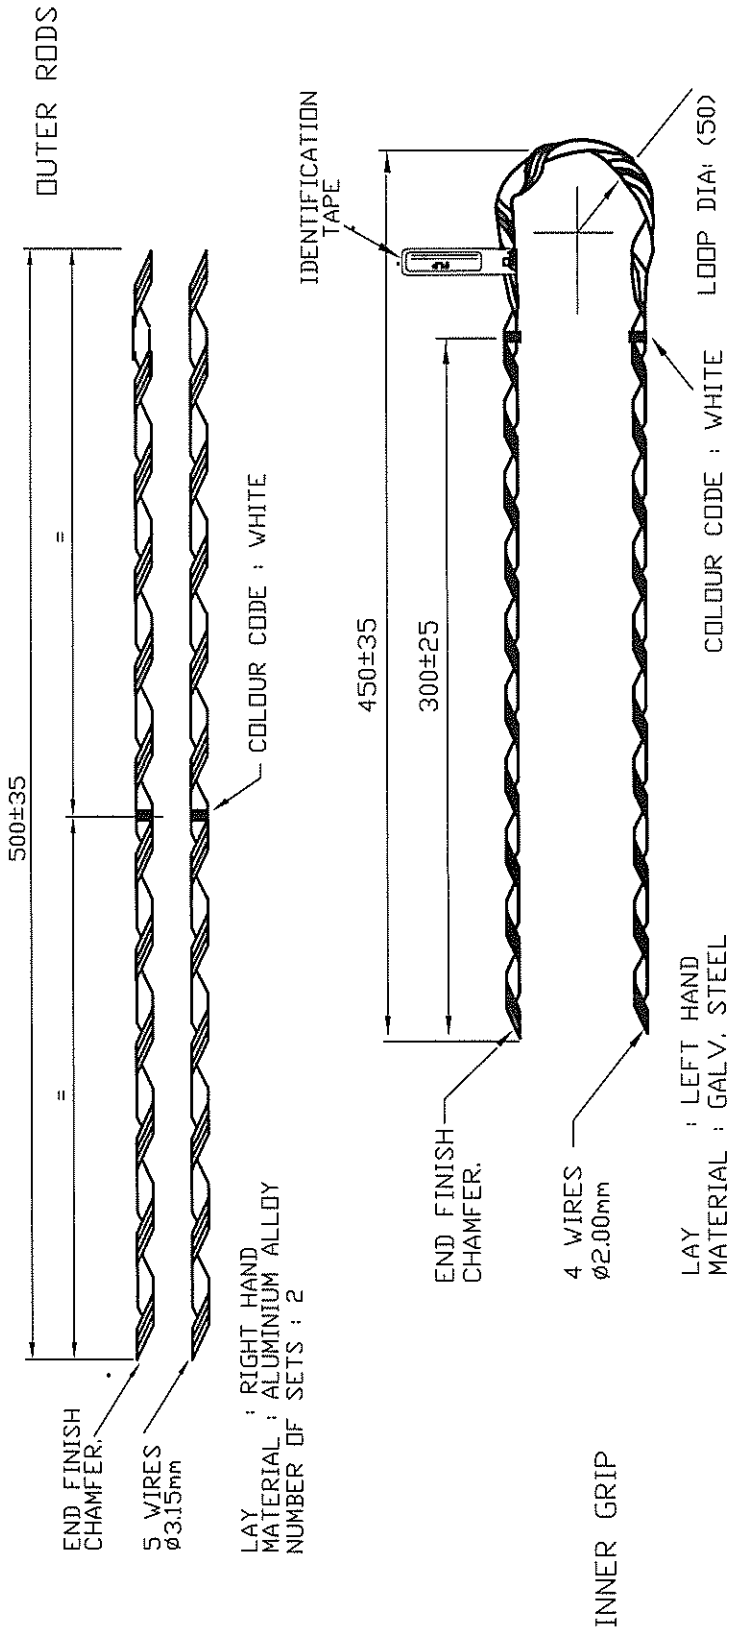

PRODUCT TAPE COLOUR : WHITE

FOR PICKEREL SMOOTH BODY  
 ACSR CONDUCTOR  
 MM/YY

PART No. FTG-084-SB  
 FULL TENSION GRIP

A	SDH	2/6/92	B	DM	13/2/06
CHK	MH	2/6/92	CHK	DF	15/2/06
INITIAL ISSUE		A7150			
DSC NO. 8757					

THIS DRAWING IS THE EXCLUSIVE PROPERTY OF PREFORMED LINE PRODUCTS (AUSTRALIA), REPRODUCTION THEREOF IS PROHIBITED AND IS TO BE USED ONLY WITH THE EXPRESSED PERMISSION OF THE COMPANY

PART No: FTG-084-SB		DATE		15/2/06	
FULL TENSION GRIP		PT		N.T.S.	
PICKEREL SB		SCALE		N.T.S.	



**PREFORMED LINE PRODUCTS  
 (AUSTRALIA) PTY. LTD.**

DRAWING NUMBER  
 052-002-RD



**Preformed Line Products (Australia) Pty Ltd.** A.B.N. 27 024 520 077  
190 Power Street, Glendenning, NSW 2761  
PO Box 626, St Marys, NSW 1790 Australia  
Ph: (02) 8805 0000 INT'L (612) 8805 0000  
Fax: (02) 8805 0091 INT'L (612) 8805 0090  
Web: [www.preformed.com.au](http://www.preformed.com.au)

## Product Guidelines

### Installation of PLP multi-piece grips


April 2011

The supplied grips consist of 2 or 3 components. These are -

- Small inner grip (gal. Steel )
- Large outer grip (aluminium )
- Filler rods (only used on some size conductors)

1. Take the small steel grip, placing the cut end of the conductor against the paint mark on the longer of the fitting legs. Tape the conductor 15mm further than the leg of the fitting.

2. Carefully remove all the aluminium strands down to the steel core, cutting next to the tape with a hacksaw or cutting tool. To prevent damage to the steel strand, do not cut the inner layer – just score and break off.

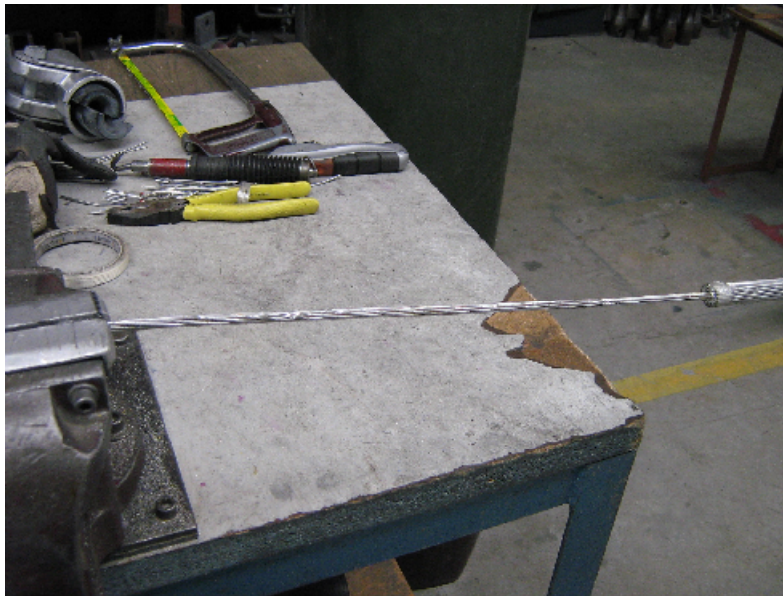


**THINK AUSTRALIAN - THINK EXCELLENCE**

Fittings and Accessories for Power and Communications  
Cabinets and Enclosures  
Solar and Renewable Energy Systems

**Preformed Line Products (Australia) Pty Ltd.** A.B.N. 27 004 533 877  
190 Power Street, Glendenning, NSW 2761  
PO Box 626, St Marys, NSW 1790 Australia  
Ph: (02) 8805 0000 INT'L (612) 8805 0000  
Fax: (02) 8805 0091 INT'L (612) 8805 0090  
Web: [www.preformed.com.au](http://www.preformed.com.au)

3. Place the leg of the inner grip through the termination thimble starting at the crossover mark and applying both legs evenly, snapping on to the conductor to finish.

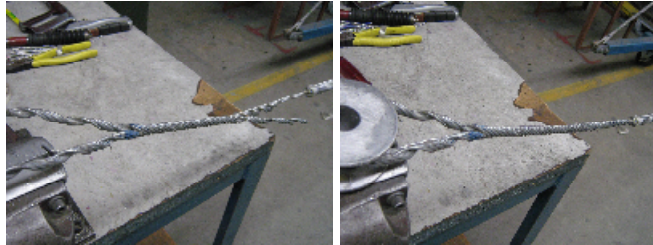

Using filler rods as a measure tape the conductor 15mm longer than the filler rods and carefully remove the outer layer of aluminium strands such that the filler rods can be accommodated.



4. Apply all the filler rods (if supplied) starting at the crossover point of the inner grip and working away from the loop of the grip.



**THINK AUSTRALIAN - THINK EXCELLENCE**

Fittings and Accessories for Power and Communications  
Cabinets and Enclosures  
Solar and Renewable Energy Systems

**Preformed Line Products (Australia) Pty Ltd.** A.B.N. 27 004 553 877

190 Power Street, Glendenning, NSW 2761  
PO Box 626, St Marys, NSW 1790 Australia  
Ph: (02) 8805 0000 INT'L (612) 8805 0000  
Fax: (02) 8805 0091 INT'L (612) 8805 0090  
Web: [www.preformed.com.au](http://www.preformed.com.au)

5. Once installed, the filler rods have brought the diameter of the fitting up to that of the conductor and all is ready for the final installation of the outer grip.



6. Place the aluminium grip through the thimble as well and allow it to sit next to the inner grip so load will be shared. Start the application at the outer grip crossover mark (this will be similar but not necessarily identical) to that on the inner grip.



7. On large fittings it may be necessary to pull away from the conductor at a larger angle when applying the grip. In these cases care must be taken not to distort the fitting.

8. If difficulty is experienced applying the last couple of pitches, the legs may be further split to allow easier snapping onto the conductor. Do not use pliers or screwdrivers as this may damage the conductor strands.

For further information please contact PLP technical sales support on the abovementioned numbers.

**THINK AUSTRALIAN - THINK EXCELLENCE**

Fittings and Accessories for Power and Communications  
Cabinets and Enclosures  
Solar and Renewable Energy Systems

This document was created with Win2PDF available at <http://www.daneprairie.com>.  
The unregistered version of Win2PDF is for evaluation or non-commercial use only.