



# CHMPPR3 Straight-through joint

for belted cables/H-Type cables up to 12 kV

Hybrid straight-through joints CHMPPR3 are suitable for belted cables and H-Type cables up to 12 kV. Suitable for compression connectors.

### Characteristics

- Wide cross-section range
- Quick, safe and easy assembly
- Ready for immediate

### Application/Suitability


- Indoor
- Outdoor
- Underground
- Water
- Installation ducts
- Ductwork

### Voltage level


- $U_0/U(U_m)6/10(12)kV - 6.35/11(12) kV$
- **Test standards**
- CENELEC HD629.2 (DIN VDE 0278, part 629-2)

### Storage conditions/Shelf life

- Unlimited shelf life

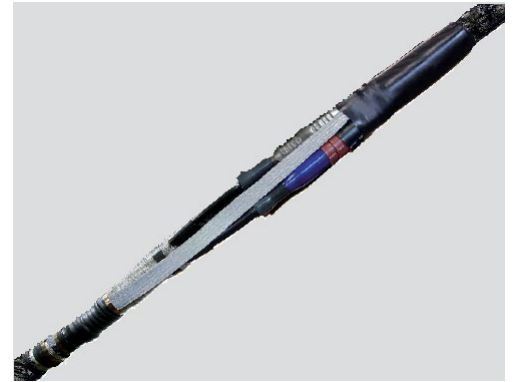

Dimensions



### Scope of delivery

Spreader cap, thick wall heat shrinkable outer tube with hot melt adhesive, oil barrier tubing, heat shrinkable tubes, earthing wire, copper braid tape, pressure spring, assembly material, sealing tape, field control filling tape (blue), fire protection wrapping, assembly instructions

Optional accessory: Compression connectors (see Connecting technology)

PLP Part No.	Type	L mm	12kV			
			Nominal cross section mm <sup>2</sup>	max. Connector $\varnothing$ mm	max. Connector length mm	
<b><math>U_0/U(U_m) 6/10 (12) kV - 6.35/11 (12) kV</math></b>						
CPA-CHMPPR3-12-050-095	CHMPPR3 12kV	50-95	1400	50 - 95	25	145
CPA-CHMPPR3-12-095-300		95-300	1400	95 - 300	34	145
CPA-CHMPPR3-12-300-400		300-400	1400	300 - 400	42	170

### AUTHORISED DISTRIBUTOR



**PREFORMED LINE PRODUCTS**

The connection you can count on.

Preformed Line Products (Australia) Pty Ltd | ABN 27 004 533 877

190 Power St Glendenning, NSW 2761 Australia

Mail Address: PO Box 626, St. Marys NSW 1790 Australia

+612.8805.0000 | sales@preformed.com | www.preformed.com.au