




Protector Tubing

NOMENCLATURE

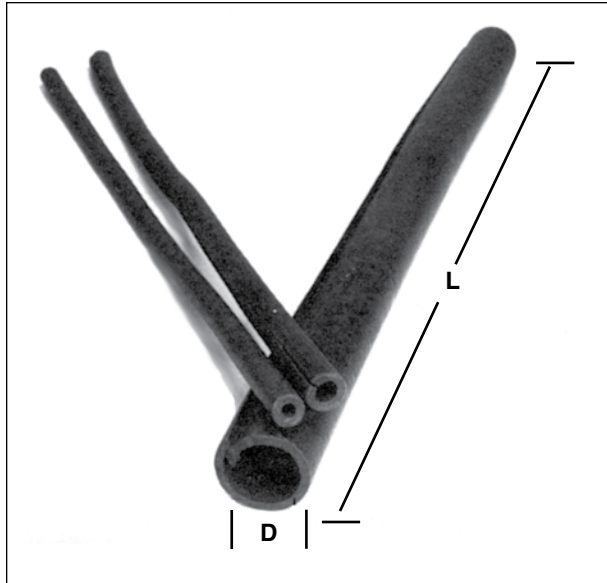

GENERAL RECOMMENDATIONS

Protector tubing protects energized lines from faults due to incidental contact caused by various types of wildlife. The durable EPDM® tubing is a minimum of 125 mils thick with a dielectric strength of 500 V/mil and has excellent resistance to ozone and petroleum based solvents. The tubing is not intended to insulate energized lines from human contact.

Catalog Number	Inside Diameter (in)	Length (ft)	Carton Quantity
	D	L	
PT-216	0.216	8	150
PT-315	0.315	8	100
PT-464	0.464	8	65
PT-665	0.664	8	35
PT-847	0.847	8	25
PT-1084	1.084	8	15
PT-1360	1.360	8	10

EXPLANATORY NOTES:

1. Slit version available, add -S to the end of the catalog number.
2. Continuous 50 foot rolls available, consult PLP on price and delivery.