




# THERMOLIGN® Suspension: Double

## DIMENSIONAL TABLES

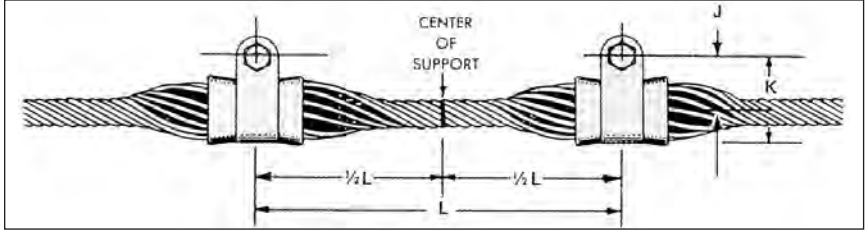

Catalog Number Range	Conductor Range (In.)		Dimensions (In.)			Vertical Ultimate Strength (Pounds)
	Min.	Max.	J	K	L	
TLS-0293 – TLS-0295	0.574	0.708	2-45/64	4-25/32	26	50,000
TLS-0296 – TLS-0300	0.709	0.855	3-5/32	5-9/16	29	50,000
TLS-0301 – TLS-0306	0.856	1.057	2-31/32	5-1/2	32	50,000
TLS-0307 – TLS 0312	1.058	1.262	3-3/16	6	37	50,000
TLS-0313 – TLS-0320	1.263	1.572	3-1/2	6-17/32	42	60,000

**EXPLANATORY NOTES:**

- (1) THERMOLIGN® Rod Length and diameter for individual sizes can be taken from catalog number table.
- (2) Additional dimensional information of the THERMOLIGN Housing is tabulated on Dimensional Tables preceding the THERMOLIGN Suspension: Double section.