




PREFORMED LINE PRODUCTS
The connection you can count on.

Pulling Eye


Safety Guy-Wire
Dispenser

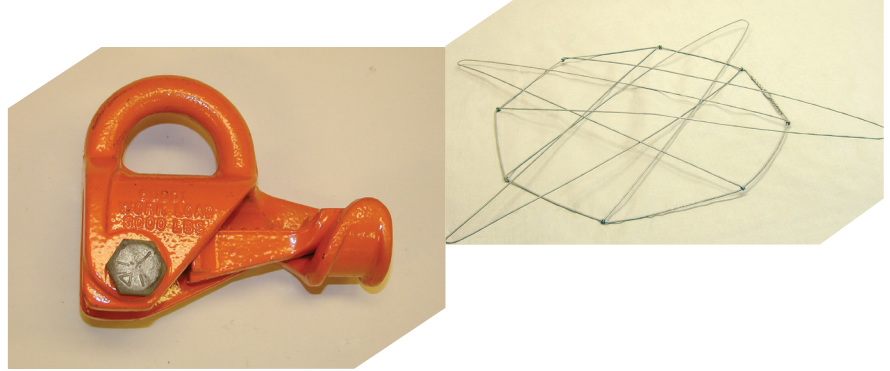


 COMMUNICATIONS

 ENERGY

 SPECIAL INDUSTRIES

 SOLAR





PLP® Distribution Products

PULLING EYE

Description

The Pulling Eye is designed to provide a functional and safe way of tensioning down guys at the anchor location. It provides a working load of 3,000 lbs with a 5:1 ratio safety factor (Ultimate strength of 15,000 lbs.).

Material

- Nodular Iron housing and keeper with EHS steel bolt and nut
- Corrosion resistant powder coating iron


Application

- Installs around the anchor hardware in seconds
- Facilitates safe, fast installation of all dead-ends by a pulling point at the anchor.

Features

- Easily installed
- Lightweight
- Reusable Tool
- Accommodates anchor rods from 1/2" – 1-1/4" (12.7 mm – 31.75 mm)

Pulling Eye		
PLP Catalog Number	Description	Standard Carton Qty.
PE-0300	Pulling Eye	4 units

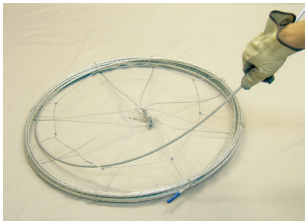

SAFETY GUY-WIRE DISPENSER

Description

The SAFETY GUY-WIRE DISPENSER is designed to provide a functional and safe way of paying-out strand. It provides an economical means of reducing hazards related to uncoiling strand. The Safety Guy-Wire Dispenser eliminates runaway coils and simplifies the banding or taping of coils.

Material

- Manufactured from high strength Galvanized Steel Wire



Application

- Installs around strand coils in seconds.
- Accepts strand coils up to 500 ft.
- Use on all strand grades, wire rope, cable and conductor

Features

- Easily installed
- Lightweight
- Pay-out strand with one person
- Simplifies inventory maintenance
- Improves coil handling
- One time use application
- Eliminates "Runaway" coils
- Occupies minimal truck space

Safety Guy-Wire Dispenser		
PLP Catalog Number	Standard Carton Qty.	Typical Coil Size
SGD-0700	50	500' 7/16" (152.4 M 11.1mm) 250' 1/2" (76.2 M 12.7mm)
SGD-0701	25	500' 1/2" (152.4 M 12.7mm)

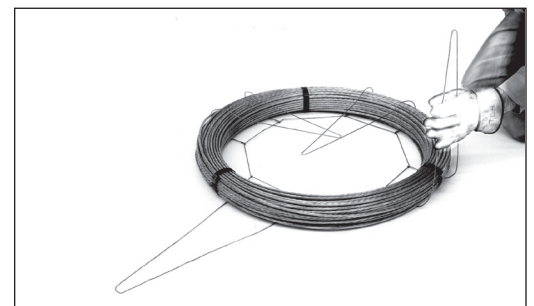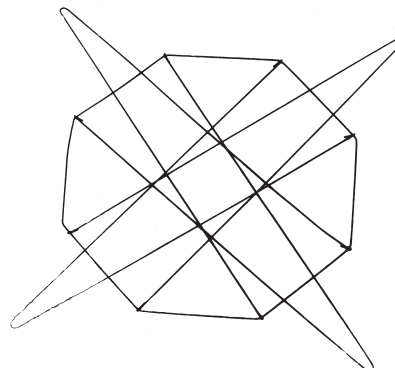

World Headquarters
660 Beta Drive
Cleveland, Ohio 44143

Mailing Address:
P.O. Box 91129
Cleveland, Ohio 44101

Telephone: 440.461.5200
Fax: 440.442.8816
Web Site: www.preformed.com
E-mail: inquiries@preformed.com

© 2015 Preformed Line Products
Printed in U.S.A.
EN-SS-1096-1
02.15.1M