





COYOTE[®] DTC4 and DTC6

The **COYOTE DTC4 and DTC6 (Drop Termination Closure)** offer a durable, compact solution with multiple internal fiber organizers to support your current and future needs. Network evolution is unpredictable so why not choose a closure system developed to adapt. The DTC4 can be used as a transition unit for interior duct applications. Both the COYOTE DTC4 and DTC6 can equip an adapter bulkhead tray that hinges to allow access to the underlaying fiber slack storage area.

Features and Benefits

- Dimensions: 10.8" x 7.8" x 3.2" (274 x 198 x 82 mm)
- Max Splice Capacity: 24 Single Fusion
- Max Adapter Quantity: 4 Dual SC or 4 Quad LC
- Grommet Quantity: 4 or 6 (Multi-Hole Grommets Available)
- Grommet Cable Diameter Range: Large Grommets = 0.118" 0.60" (3 15 mm)

Small Grommets = 0.093" - 0.420" (2.4 - 10.7 mm) and Flat Drop


- Applications: Aerial, Below Grade, Direct Buried, Pole/Wall Mount, Pedestal, or Interior Applications
- Designed and tested in accordance to Telcordia® GR-771-CORE Buried, Underground, IP-68 Rated Requirements
- Constructed out of rugged UV-stabilized, flame-retardant material (UL94-5VA Rated)
- Hinged cover with integrated over-mold creates a secure seal and provides quick re-entry and re-use






► COYOTE[®] DTC4 and DTC6 Splice Only

The COYOTE DTC4 and DTC6 offers a durable compact solution with multiple internal fiber organizers. The DTC4 can be used as a splicing point or as a transition unit for interior duct applications.

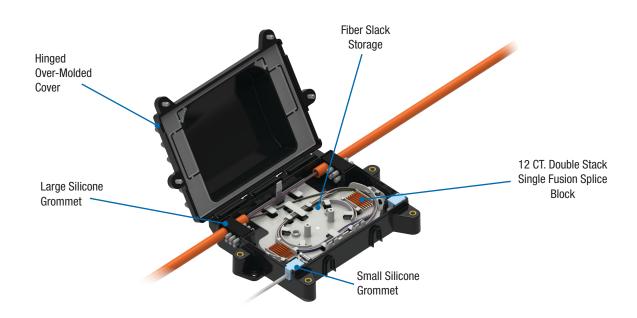

► COYOTE[®] DTC4 and DTC6 Splice and Adapters

The DTC4 and DTC6 can equip a hinged adapter bulkhead that allows access to the underlaying fiber slack storage area. The adapter bulkhead can accept up to (4) Dual SC or (4) Quad LC adapters. A 1x2, 1x4, or 1x8 PLC connectorized or non-connectorized splitter can be placed in the splitter block.

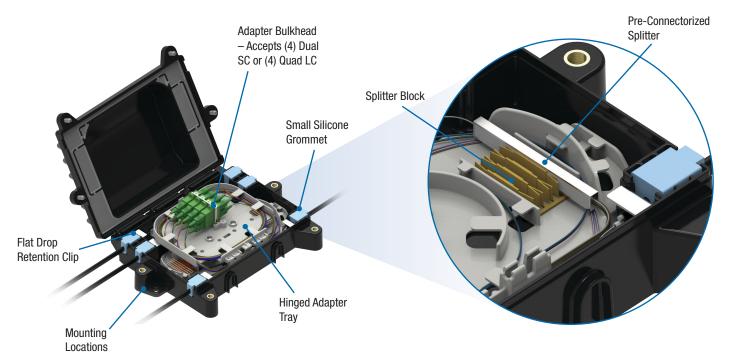







COYOTE[®] DTC6 Small Cell Applications


The COYOTE DTC6 is ideal for use in small cell applications as a handoff point between a dark fiber supplier and a carrier. The small scale profile, 10.8" x 7.8" x 3.2", paired with an IP-68 rated seal allows this fiber closure to be mounted on existing infrastructure in the public right of way such as a utility pole, traffic light or street light pole, as well as a small handhole without a cause for aesthetic concern, or the ability for water intrusion. Therefore, reducing fiber closure SKUs when deploying a network. The internal fiber organizer is flexible for cables up to 0.420" in diameter and provides the ability for hard splicing (24 CT.) and up to 8 SC or 16 LC connectors.

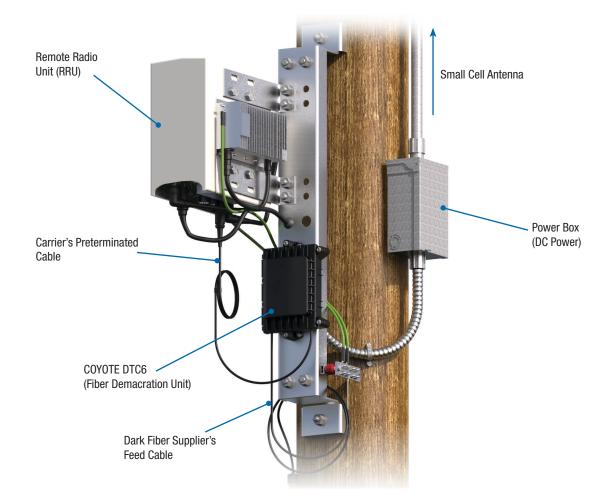

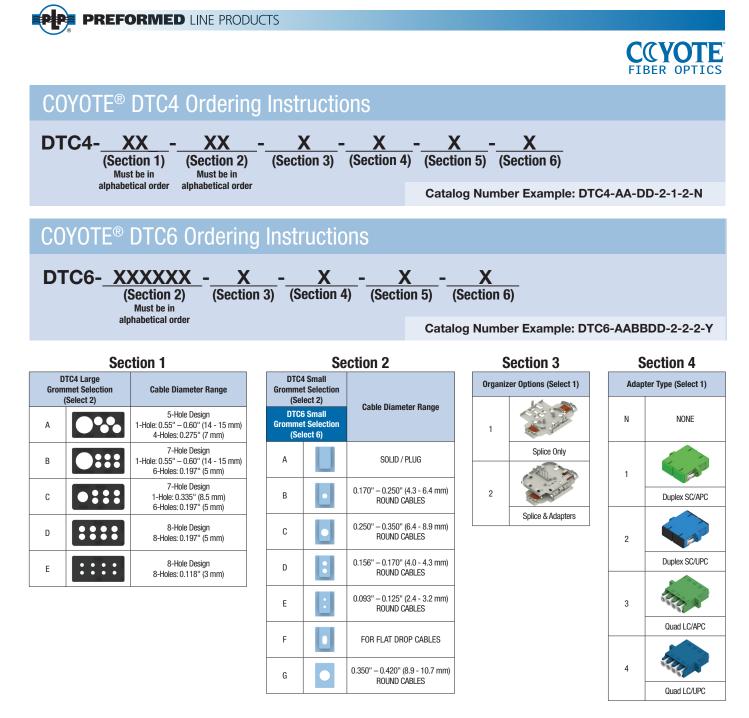

Section 5





Section 6

Accessories	
10000001100	

Catalog No.	Description
8004109	COYOTE DTC4/6 Pole/Wall Mounting Bracket
8004110	COYOTE DTC4/6 Cable Storage Bracket
8004111	COYOTE DTC4/6 Aerial Mounting Bracket – Strand Applications
8004112	COYOTE DTC4/6 Aerial Mounting Bracket – ADSS Applications



Global Headquarters 660 Beta Drive Cleveland, Ohio 44143 Mailing Address: P.O. Box 91129 Cleveland, Ohio 44101 Telephone: 440.461.5200 Fax: 440.442.8816 preformed.com Email: inquiries@preformed.com @ 2020 Preformed Line Products Printed in U.S.A. CO-SS-1146-3 01-20-IH