



BROUGHT TO YOU BY
PREFORMED LINE PRODUCTS COMPANY

Vineyard, fencing, and trellising connectors and tensioners



Features

- Up to 70% faster than traditional joining systems
- Recommended for a wide range of wires and cables: galvanized steel, polymer, zinc-aluminum coated steel wire, barbed wire, and electric fencing
- Adjustable versions available
- Made with high-quality zinc to ensure a long life. Sturdy and corrosion resistant.

Operation and Uses

The inner mechanism of the [MAXTENSOR Connectors and Terminations](#) enables free passage of wire in the direction of the arrow and immediately prevents pulling in the opposite direction.

The connectors have two opposing entry holes through which the wires are inserted. Upon connection, the system can be tightened by pulling one of the wires using the [MAXTENSOR MX-AC](#) tensioning tool.

The [MX2-DT](#) connector and tensioner can be adjusted using the [MX-HDI](#) and [MX-HDMI](#) tools. This method enables wire to be adjusted or re-tensioned.

MAXTENSOR connectors and terminations are specially designed for joining and terminating wires on vineyard, orchard trellising, and livestock fencing. Maxtensor products can be used for both repair and new construction.

CONNECTORS

MXS2



MAXTENSOR Pro MXS2
Recommended max. load: 660 lb (250 kg)
Range of diameter: 0.05" - 0.09" (1.8 to 2.2 mm)

Ideal for use on: 14 gauge smooth

Carton Qty: 300

MX2-DT



MAXTENSOR Pro MX2-DT
Recommended max. load: 880 lb (400 kg)
Range of diameter: 0.07" - 0.13" (1.8 to 3.2 mm)

Ideal for use on: 12.5 gauge smooth

Carton Qty: 250 (Comes with 5 MX-HDI)

MX2



MAXTENSOR Pro MX2
Recommended max. load: 880 lb (400 kg)
Range of diameter: 0.07" - 0.13" (1.8 to 3.2 mm)

Ideal for use on: 15.5 gauge barbed,
12.5 gauge smooth

Carton Qty: 250

MXL2



MAXTENSOR Pro MXL2
Recommended max. load: 1320 lb (600 kg)
Range of diameter: 0.13" - 0.17" (3.3 to 4.2 mm)

Ideal for use on: 14 gauge barbed

Carton Qty: 150



SAFETY FIRST

Refer to the application procedures for proper installation.

For more information about these products, contact PLP.

MAXTENSOR Connectors/Terminations are ideal for vineyard trellising, orchard trellising, and livestock fencing.

TERMINATIONS

MX1



MAXTENSOR MX1
 Max. recommended load: 880 lb (400 kg)
 Range of diameter: 0.07" - 0.125" (1.8 to 3.2 mm)

Ideal for use on: 12.5 gauge smooth

Carton Qty: 300

MX1-WP




MAXTENSOR MX1-WP
 Max. recommended load: 880 lb (400 kg)
 Range of diameter: 0.07" - 0.13" (1.8 to 3.2 mm)

Ideal for use on: 12.5 gauge smooth

Carton Qty: 300

MX1-T



MAXTENSOR MX1-T
 Max. recommended load: 880 lb (400 kg)
 Range of diameter: 0.07" - 0.125" (1.8 to 3.2 mm)

Ideal for use on: 12.5 gauge smooth

Carton Qty: 250

RE-TENSIONING TOOLS

MX-HDI

Simple and functional tool, included with MX2-DT.



MX-HDIM

Tool designed to be used in any working position, with straight and 90° angle tip. Ergonomic handle for easy grip.



TENSIONING TOOLS

Made of steel.

MX-AC

Rated: 770 lb (350 kg), Ideal for Connectors




MX-AC2

Ideal for Terminations



MAXTENSOR is multi-functional – it may be used for different types of wire and cable

- Galvanized steel wire
- Zinc-Aluminum coated steel wire
- Stainless steel wire
- High tensile steel wire
- Barbed wire
- Electrical fencing
- Wire rope

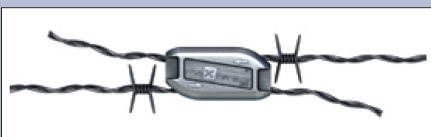



Americas

PLP U.S.A.

Global Headquarters
Cleveland, Ohio
www.preformed.com
Domestic Plant Locations
Rogers, Arkansas
Albemarle, North Carolina

PLP Brazil

São Paulo, Brazil
www.plp.com.br

PLP Canada

Cambridge, Ontario, Canada
www.preformed.on.ca
Helix Uniformed Ltd.
Lachine, Quebec, Canada
www.helix-uni.ca

PLP Colombia

Medellin, Colombia
www.preformed.com

PLP Mexico

Querétaro, Mexico
www.plpmexico.com

PLP Argentina

Buenos Aires, Argentina
www.plpargentina.com.ar

EMEA

Austria

Dornbirn
Subcon Electrical
Fittings GmbH
www.preformed.com

Czech Republic

Prostějov
MICOS TELCOM
www.preformed.com

France

Paris
www.preformed.com

Great Britain

Andover, Hampshire
www.preformed-gb.com

Poland

Bielsko-Biala
www.belos-plp.com.pl

Russia

Moscow
www.plp.ru

Spain

Seville
www.plp-spain.com

South Africa

Pietermaritzburg
www.preformedsa.co.za

Asia Pacific

PLP Australia

Sydney, Australia
www.preformed.com.au

PLP China

Beijing, China
www.plp.com.cn

PLP Indonesia

Bekasi, Indonesia
www.preformed.asia/indonesia

PLP Malaysia

Selangor, Malaysia
www.preformed.asia/malaysia

PLP Thailand

Bangkok, Thailand
www.plp-asia.co.th

PLP New Zealand

Auckland, New Zealand
www.preformed.co.nz

PLP OFFERS A WIDE ARRAY OF PRODUCT SOLUTIONS. WE KNOW WHAT IT TAKES TO PROVIDE THE RIGHT SOLUTIONS WITHIN THE VARIED GEOGRAPHY OF ENERGY AND COMMUNICATION INFRASTRUCTURES AROUND THE WORLD.



PREFORMED LINE PRODUCTS

Global Headquarters

Preformed Line Products Company
660 Beta Drive
Cleveland, Ohio 44143

Mailing Address

P.O. Box 91129
Cleveland, Ohio 44101

Telephone: 440.461.5200

Fax: 440.442.8816

Website: preformed.com

Email: inquiries@preformed.com

© 2019 Preformed Line Products Company
Printed in U.S.A.
NU-BR-1030-1
08-19-IH