


COYOTE® STP-MD

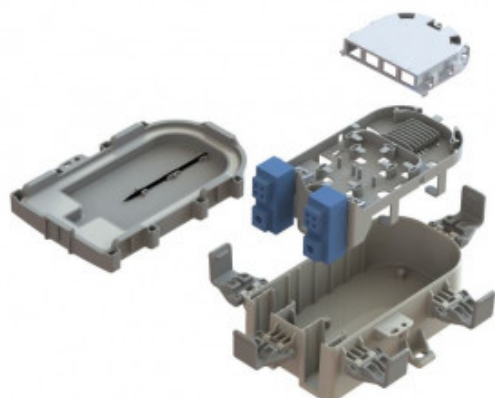

Weight: 0.00kg

Dimensions: 0.00cm x 0.00cm x 0.00cm

Description

The COYOTE® STP-MD (Service Termination Point-Medium) is a compact splice closure which supports straight splice, splice to drop/branch and Internal connectivity applications. Ideal for applications in the FTTX distribution network for splice applications 24 fibers or less and connectivity solutions.

Ideal product for blown fiber cable and microtube cable applications. Also supports use of traditional buffer tube cables.

Features

- **Dimensions:** 200mm x 125mm x 125mm x 70mm (8"x4.8" x 2.75)
- Supports up to 4 single or multi- hole grommets covering a cable diameter range from 2.4mm - 14.0mm
- **Drops:** Maximum 8
- **Max Splice Capacity:** 24
- **Max Adapter Capacity:** 4 Flangless SC connectors.
- Capable of storing expressed buffer tube cables up to 24ct standard buffer tube, 48ct tight buffer tube.
- One slot available for small PLC Splitter (max length:40mm)
- If Splitter installed, splice count drops to 21 single fusion splices.
- Factory intergrated sealing materials eliminate need for re-entry kits.
- Re-enterable and reusable.
- Designed to the TELCORDIA GR-771-CORE standard.
- Constructed with UV stabilized, flame retardant material.

Documentation

Application Procedure

[STP-MD + Retention Clip User Instruction](#)

Product Gallery

