


TBFCTS

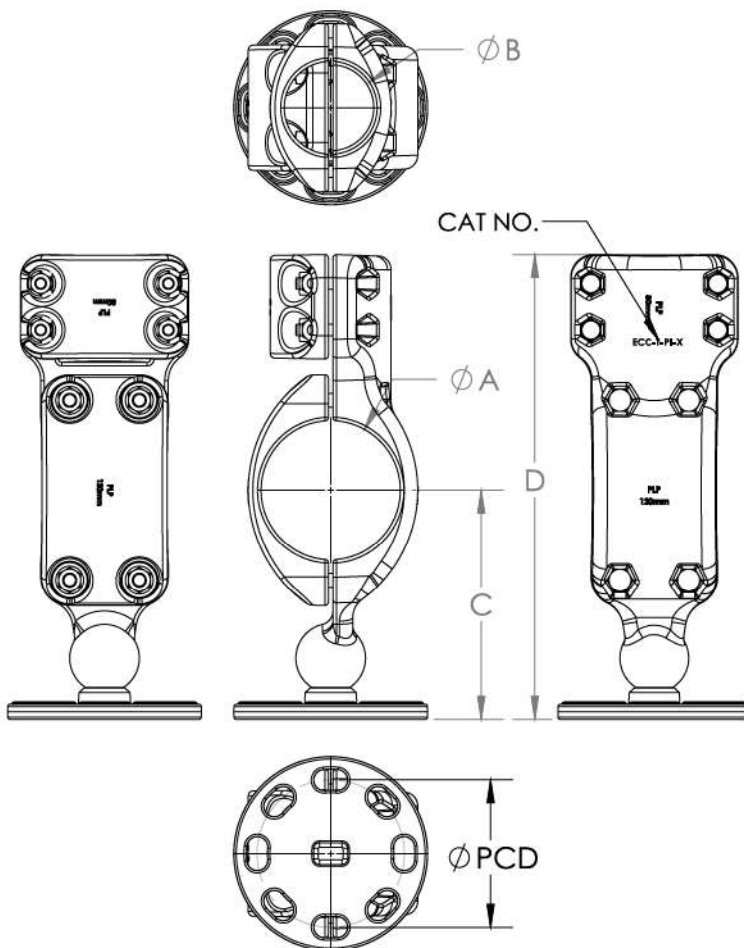

NOTES:

- To connect two busbars (post insulator) fixed tee connection.
- Material: Fasteners for:
Tube diam. 80-120mm
Stainless steel Gr. A4.
Tube Diam. 150-250mm
Anodised HT 7075 AL Alloy.
Components are cast aluminium.
- Bolt torque values:
M10 (St steel) 35Nm, (AL.) 21 Nm
M12 (St steel) 60Nm, (AL) 36 Nm
- Cat No. to be stamped in location shown.
- All bolted joint clamp and conductor/busbar surfaces to be cleaned with a stainless steel wire brush and a suitable conductive grease applied before use.
- Supplied in a clear, sealed, heavy duty, UV stabilized plastic bag.

ESKOM CODE	PLP CATALOGUE NO.	TUBE DIAM. (A) mm	TUBE DIAM. (B) mm	P.C.D mm	(C) mm	(D) mm	MINIMUM RATED CURRENT @ 90°C	WEIGHT kg
ECC-T-PI-A	TBFCTS-80-80-76	80	80	76	165	340	2000	145
ECC-T-PI-B	TBFCTS-80-80-127	80	80	127	165	340	2000	145
ECC-T-PI-E	TBFCTS-120-80-127	120	80	127	203	405	3150	145
ECC-T-PI-F	TBFCTS-120-80-225	120	80	225	203	405	3150	145
ECC-T-PI-G	TBFCTS-120-120-127	120	120	127	203	425	3150	145
ECC-T-PI-H	TBFCTS-120-120-225	120	120	225	203	425	3150	145
ECC-T-PI-N	TBFCTS-200-200-127	200	200	127	258	570	4000	145
ECC-T-PI-P	TBFCTS-200-200-225	200	200	225	258	570	4000	800
ECC-T-PI-Q	TBFCTS-250-250-127	250	250	127	288	682	4000	800
ECC-T-PI-R	TBFCTS-250-250-225	250	250	225	288	682	4000	800