
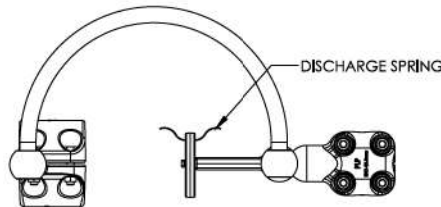



TBXS

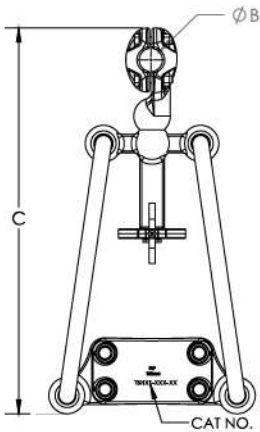

NOTES:

- To connect a busbar to a solid stem terminal (expansion connection).
- Material: Fasteners for:
Tube diam. 80-120mm
Stainless steel Gr. A4.
Tube Diam. 150-250mm.
Anodised HT 7075 AL Alloy.
HDG steel plate
Components are cast aluminium.
- Bolt torque values:
M10 (St steel) 35Nm, (AL) 21 Nm
M12 (St steel) 60Nm, (AL) 36 Nm
- Cat No. to be stamped in location shown.
- All bolted joint clamp and conductor/busbar surfaces to be cleaned with a stainless steel wire brush and a suitable conductive grease applied before use.
- Supplied in a clear, sealed, heavy duty, UV stabilized plastic bag.
- Supplied with a static discharge strap.
- Fitting supplied with a stainless steel discharge spring.

ESKOM CODE	PLP CATALOGUE NO.	TUBE DIAM. (A) mm	STEM DIAM. (B) mm	(C) mm	MINIMUM RATED CURRENT @ 90°C	MAXIMUM VOLTAGE kV rms	WEIGHT kg
EEC-H/VS-TB-A	TBXS-80-26	80	26	625	900	145	6.9
EEC-H/VS-TB-B	TBXS-80-38	80	38	625	1350	145	6.8
EEC-H/VS-TB-C	TBXS-80-60	80	60	645	2000	145	8.2
EEC-H/VS-TB-G	TBXS-120-26	120	26	645	900	145	8.9
EEC-H/VS-TB-H	TBXS-120-38	120	38	645	1350	145	8.8
EEC-H/VS-TB-J	TBXS-120-60	120	60	645	2000	145	9.6