
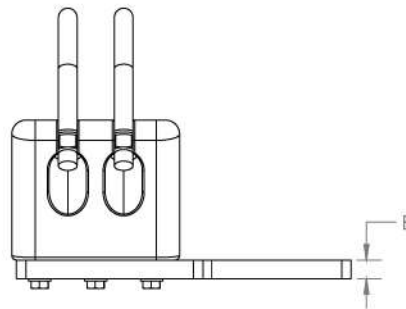
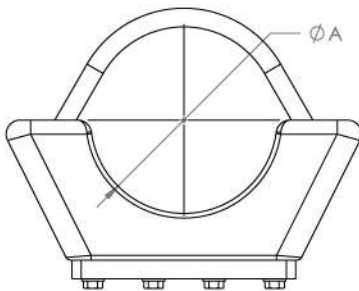


TBP-9H-0

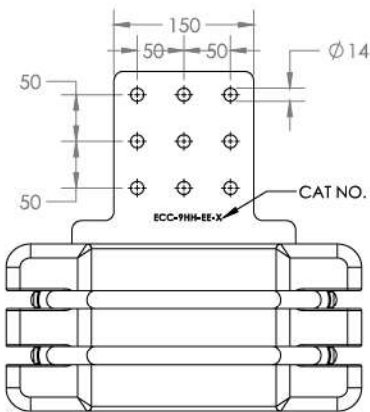

NOTES:

- To connect a busbar to an 9 hole terminal.
- **Material:** Fasteners for:
Tube Diam. 150-250mm.
Anodised HT 7075 AL Alloy
Components are cast aluminium.
- **Bolt torque values:**
M12 (St steel) 60Nm, (AL.) 36Nm
M20 (HDG) 90Nm
M24 (HDG) 130Nm
- Cat No. to be stamped in location shown.
- All bolted joint clamp and conductor/busbar surfaces to be cleaned with a stainless steel wire brush and a suitable conductive grease applied before use.
- Supplied in a clear, sealed, heavy duty, UV stabilized plastic bag.

ESKOM CODE	PLP CATALOGUE NO.	TUBE DIAM. (A) mm	(B) mm	MINIMUM RATED CURRENT @ 90°C V	MAXIMUM VOLTAGE kV rms	WEIGHT kg
ECC-9HH-EE-A	TBP-200-9H-O	200	20	4000	800	12.7
ECC-9HH-EE-B	TBP-250-9H-O	250	20	4000	800	16.9