

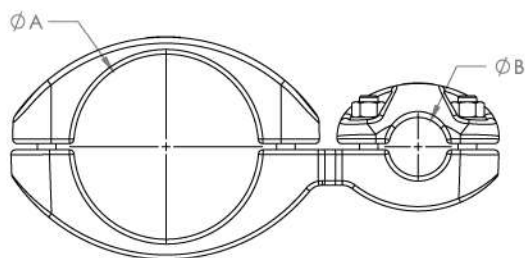


TBST

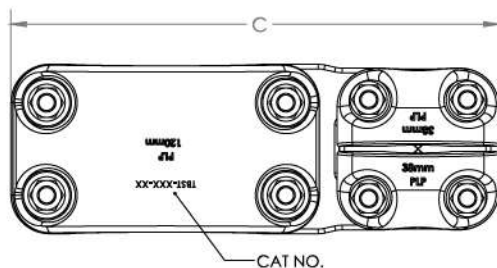

NOTES:

- To connect a busbar to a single solid stem.
- Material: Fasteners for:
Tube diam. 80-120mm
Stainless steel Gr. A4.
Tube Diam. 150-250mm.
Anodised HT 7075 AL Alloy
Components are cast aluminium.
- Bolt torque values:
M10 (St steel) 35Nm, (AL.) 21Nm
M12 (St steel) 60Nm, (AL.) 36Nm
- Cat No. to be stamped in location shown.
- All bolted joint clamp and conductor/busbar surfaces to be cleaned with a stainless steel wire brush and a suitable conductive grease applied before use.
- Supplied in a clear, sealed, heavy duty, UV stabilized plastic bag.

ESKOM CODE	PLP CATALOGUE NO.	TUBE DIAM. (A) mm	STEM DIAM. (B) mm	(C) mm	MINIMUM	MAXIMUM	WEIGHT kg
					RATED CURRENT @ 90°C	VOLTAGE kV rms	
ECC-T-ST-A	TBST-80-26	80	26	260	900	900	3.4
ECC-T-ST-B	TBST-80-38	80	38	260	1350	1350	3.3
ECC-T-ST-E	TBST-120-26	120	26	315	900	900	4.7
ECC-T-ST-F	TBST-120-38	120	38	315	1350	1350	4.6