


APPLICATION PROCEDURE & SAFETY CONSIDERATIONS

PREFORMED LINE PRODUCTS



PULLING EYE


NOTE:
3,000 lbs. working load
marked on casting

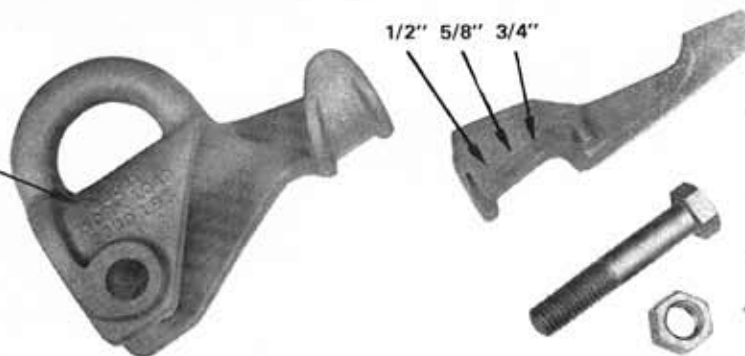

1. Component Parts. The keeper is to be used with 1/2", 5/8", and 3/4" anchor rods (see arrows). For 1" and 1-1/4" anchor rods, the PREFORMED™ Pulling Eye is used without the keeper.

(Note: The bolt is made of specially heat-treated extra-high-strength steel, and is identified by the industry mark on its head. Any replacement should be of the same quality.)

NOTE: For convenience keep the eye at a 90 degree angle to the anchor rod and groove.

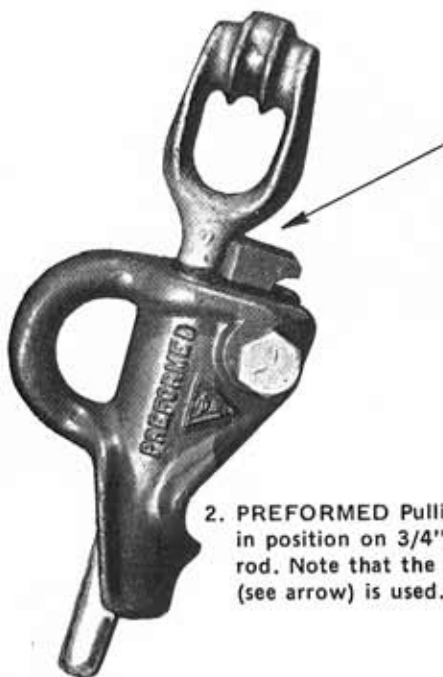

2. PREFORMED Pulling Eye in position on 3/4" anchor rod. Note that the keeper (see arrow) is used.



3. PREFORMED Pulling Eye in position on 1-1/4" anchor rod. Note that the keeper is not used.

SAFETY CONSIDERATIONS

1. This application procedure is not intended to supersede any company construction or safety standards. This procedure is offered only to illustrate safe application for the individual. **CAUTION: FAILURE TO FOLLOW THESE PROCEDURES AND RESTRICTIONS MAY RESULT IN PERSONAL INJURY OR DEATH.**
2. This product is intended for the specified application. **CAUTION: DO NOT MODIFY THIS PRODUCT UNDER ANY CIRCUMSTANCES.**
3. This product is intended for use by trained craftspeople only. This product **SHOULD NOT BE USED** by anyone who is not familiar with and trained in the use of it.
4. When working in the area of energized lines with this product, **EXTRA CARE** should be taken to prevent accidental electrical contact.
5. For **PROPER PERFORMANCE AND PERSONAL SAFETY** be sure to select the proper size PREFORMED™ product before application.
6. PREFORMED products are precision devices. To insure proper performance, they should be stored in cartons under cover and handled carefully.

©1997 Prefomed Line Products. All rights reserved.

PREFORMED LINE PRODUCTS

P.O. Box 91129 • Cleveland, Ohio 44101