


Pulling Eye (Red Devil)

The PREFORMED™ Pulling Eye is designed to facilitate safe, fast installation of GUY-GRIP dead-ends at the anchor rod. Constructed of corrosion-resistant nodular iron, this re-usable tool has a large eye which is offset to position the hook of the chain hoist safely to one side, and permit easy, uncrowded application of the dead-end. The PREFORMED™ Pulling Eye is adjustable for rod size, and is engineered to withstand a 1360 kg working load without failure. A red vinyl coating provides weather and handling protection and ready identification.

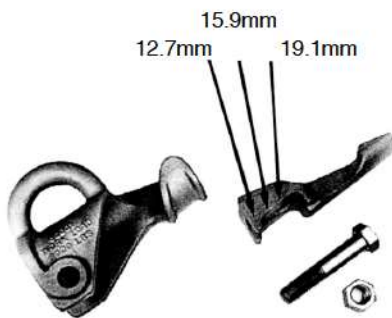

1. Component Parts: The keeper is to be used with 12.7mm, 15.9mm, and 19.1mm anchor rods (see arrows). For 25.4mm and 31.8mm anchor rods, the PREFORMED Pulling Eye is used without the keeper.

CAUTION: The Pulling Eye must be secured with the nut and bolt on every installation.

(Note: The bolt is made of specially heat-treated extra-high-strength steel, and is identified by the industry mark on its head. Any replacement should be of the same quality.)



2. PREFORMED Pulling Eye is position on 19.1mm anchor rod. Note that the keeper (see arrow) is used.



3. PREFORMED Pulling Eye in position on 31.8mm anchor rod. Note that the keeper is not used.

Catalogue No.: PEO

CATALOGUE NO.	DESCRIPTION	STD. CTN.
PEO-300	Pulling Eye	4 Units

NOTE: 1 360kg working load is based on a 5 to 1 safety factor