





# **COYOTE® IN-LINE RUNT CLOSURE**

The **COYOTE In-Line RUNT Closure** has the versatility to be used in both distribution and fiber-to-the-premise (FTTP) networks for in-line or butt applications. The compact size allows for placement in small handholes and pedestals.

#### **FEATURES AND BENEFITS**

- Internal organizer manages buffer tube or ribbon
- $\bullet \ \ \text{Multiple splice tray designs support mass fusion splicing, single fusion splicing, or a combination of both}$
- · Flexible grommet sealing technology supports a wide range of flat and round cable profiles
- Factory-installed gasket allows re-entry and re-use
- Flame-retardant kits available
- Designed and tested in accordance with Telcordia® GR-771-CORE Buried, Underground, IP-68 Rated Requirements



## **Specifications**

| •   |  |
|---|--|
| Catalog Number  | 8006951, 8006952, 80061049   |
| Splice Capacity (Maximum) – Single Fusion<br>(Low Profile, 80809958), Single Fusion (Low<br>Profile, 80813152), Single Fusion (Deep Profile,<br>80808945), Mass Fusion (Deep Profile, LGSTR144) | 96, 144, 80, 288   |
| Number of Splice Trays – 80809958, 80813152,<br>80808945, LGSTR144  | 4, 4, 2, 2   |
| Cable Ports <sup>1</sup>  | 4 (2 at each end)  |
| Cable Diameters   | 0.093" – 1.20" (2.4 – 30.5 mm) and Flat Drop   |
| Configuration   | In-Line or Butt  |
| Application   | Direct Bury, Below Grade, Pole/Wall, Aerial only for 8006952, Indoor only for 80061049 |
| Ingress Protection  | In accordance with Telcordia® GR-771-CORE, Buried, Underground; IP-68                  |
| Size <sup>2</sup>   | 18.7" L x 10.0" W x 3.7" H (475 x 254 x 94 mm)   |

<sup>&</sup>lt;sup>1</sup> Multi-hole grommets allow for more than one cable to enter each cable port

### **COYOTE In-Line RUNT Closure Kit Contents**

| Catalog Number | Description  |
|----------------|--|
| 8006951        | In-Line RUNT Hermetically Sealed – Includes (2) 1-Hole Grommets 0.40" – 0.60" (10.2 – 15.2 mm), (1) 2-Hole Grommet 0.42" – 0.60" (10.7 – 15.2 mm), and (1) 4-Hole Grommet 0.30" – 0.43" (7.6 – 10.9 mm)  |
| 8006952        | In-Line RUNT Free Breathing – Includes (2) 1-Hole Grommets 0.40" – 0.60" (10.2 – 15.2 mm), (1) 2-Hole Grommet 0.42" – 0.60" (10.7 – 15.2 mm), and (1) 4-Hole Grommet 0.30" – 0.43" (7.6 – 10.9 mm)   |
| 80061049       | In-Line RUNT Flame Retardant, Hermetically Sealed – Includes (2) 1-Hole Grommets 0.40" – 0.60" (10.2 – 15.2 mm), (1) 2-Hole Grommet 0.42" – 0.60" (10.7 – 15.2 mm), (1) 4-Hole Grommet 0.30" – 0.43" (7.6 – 10.9 mm), (1) 6-Hole Grommet 0.125" - 0.250" (3.2 - 6.4 mm) and Flat Drop Cables, and a Torque Limiting Tool. For indoor use only. |


All kits include (1) Closure Assembly, (4) Silicone Grommets and Cable Restraint Hardware (Splice Trays and Hanger Brackets Sold Separately)



Hermetically Sealed Catalog Number: 8006951



Free Breathing Catalog Number: 8006952




Flame Retardant, Hermetically Sealed Catalog Number: 80061049

<sup>&</sup>lt;sup>2</sup> Outermost part of the assembly.



## **ACCESSORIES**

| Catalog Number | Description   |
|----------------|---|
| 80809958       | Splice Tray, COYOTE LITE-GRIP® Short, Low Profile, 24 CT., Single Fusion  |
| 80813152       | Splice Tray, COYOTE LITE-GRIP Short, Low Profile, 36 CT., Single Fusion   |
| 80808945       | Splice Tray, COYOTE LITE-GRIP Short, Deep Profile, 40 CT., Single Fusion  |
| LGSTR144       | Splice Tray, COYOTE LITE-GRIP Short, Deep Profile, 144 CT., Mass Fusion   |
| 8004160        | Heat Shrink Splice Protector Kit – Includes (50) 40 mm Mass Fusion  |
| 8004095        | Heat Shrink Splice Protector Kit – Includes (50) 40 mm Single Fusion  |
| 8003717        | Heat Shrink Splice Protector Kit – Includes (50) 60 mm Single Fusion  |
| 80811124       | 6 Position SC/APC Cross-Connect Bulkhead  |
| 80813787       | 6 Position ST/UPC Cross-Connect Bulkhead  |
| 80811123       | 8 Position SC/APC Cross-Connect Bulkhead  |
| 80811126       | 6 Position SC/UPC Cross-Connect Bulkhead  |
| 80811125       | 8 Position SC/UPC Cross-Connect Bulkhead  |
| 80809054       | Cross-Connect Bulkhead  |
| 8003733        | End Plate Kit – Includes (1) End Plate Cap with Integrated Gasket, (1) Package of Silicone Lubricant, and (3) Bolts |
| 80807794       | Hardware Bag  |
| 80805293       | Transport Tube Kit – Includes (6) 0.135" (3.4 mm) ID x 34" (863 mm) Long Transport Tubes                            |
| 80808639       | Transport Tube Kit – Includes (3) 0.25" (6.3 mm) ID x 6' (1828 mm) Long Transport Tubes                             |
| 8004180        | 6-Port Flat Drop Cable Retention Kit  |
| 8004181        | 8-Port Flat Drop Cable Retention Kit  |

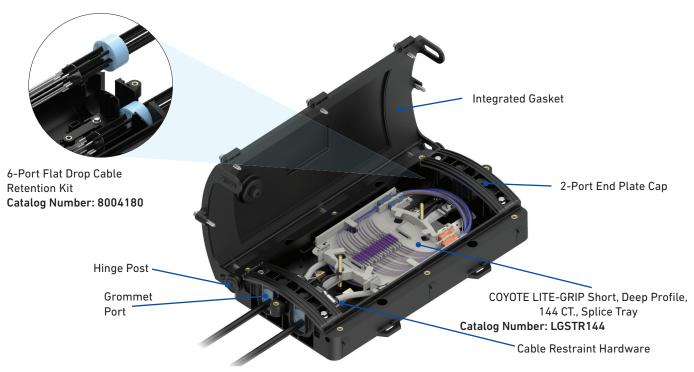

COYOTE In-Line RUNT, Hermetically Sealed 144 CT. Ribbon Application

28 PLP.COM CO-CA-1004-17



## **MOUNTING BRACKETS**

| Catalog Number | Description  |
|----------------|--|
| 8003797        | Aerial Mounting Bracket – Strand Applications            |
| 8004179        | Horizontal Aerial Mounting Bracket – Strand Applications |
| 8003864        | Aerial Mounting Bracket – ADSS Applications              |
| 8003703        | Pole/Wall Mounting Bracket                               |
| 8003835        | Universal Mounting Bracket – Handhole Applications       |
| 8003706        | Swing Arm Mounting Bracket                               |



Aerial Mounting Bracket for Strand Application Catalog Number: 8003797



Horizontal Aerial Mounting Bracket for Strand Application Catalog Number: 8004179



Pole/Wall Mounting Bracket Catalog Number: 8003703



Universal Mounting Bracket Catalog Number: 8003835

CO-CA-1004-17 PLP.COM 29